

STANDARD TECHNICAL SPECIFICATION COVER SHEET

Specification No. : ENG-GEN-4012

Specification Name : Technical Specification for RSJ Poles 150X150mm(9 mtr, 10 mtr, 11 mtr & 13 mtr)

SANTOSH KUMAR PATRA	SATYA PRASAD NAYAK	SHANTAPRIYA JENA	Ranjan Kumar Sahoo	ANUP JAWASE	VARUN BHATNAGAR
Prepared by	Reviewed by	Reviewed by	Reviewed by	Approved by	Released by
TPWODL	TPCODL	TPNODL	TPSODL	TPWODL	TPWODL
08-02-2023	09-02-2023	14-02-2023	14-02-2023	15-02-2023	17-02-2023

Property of TATA POWER ODISHA DISCOMs – Not to be reproduced without permission of TPCODL/ TPNODL/ TPSODL/ TPWODL

CONTENTS

1. SCOPE
2. APPLICABLE STANDARDS
3. CLIMATIC CONDITIONS OF THE INSTALLATION
4. GENERAL TECHNICAL REQUIREMENTS
5. GENERAL CONSTRUCTIONS/REQUIREMENTS
6. MARKING
7. TESTS
8. TYPE TEST CERTIFICATES
9. PRE-DISPATCH INSPECTION
10. INSPECTION AFTER RECEIPT AT STORES
11. GUARANTEE
12. PACKING
13. TENDER SAMPLE
14. QUALITY CONTROL
15. MINIMUM TESTING FACILITIES
16. MANUFACTURING ACTIVITIES
17. SPARES, ACCESSORIES AND TOOLS
18. DRAWINGS AND DOCUMENTS
19. GUARANTEED TECHNICAL PARTICULARS
20. SCHEDULE OF DEVIATIONS

1. SCOPE:

This specification covers the design, manufacture, testing and supply of 150mm X 150 mm RSJ pole, 9mtr, 10mtr, 11mtr & 13mtr. long having a unit weight of 34.60Kg per meter. Scope also includes transportation & unloading of poles at store / site.

2. APPLICABLE STANDARDS:

The equipment covered by this specification shall unless otherwise stated, be designed, manufactured and tested in accordance with the latest editions of the following Indian, International Standards and shall conform to the regulations of the local authorities:

IS 2062	Hot Rolled Medium and High Tensile Structural Steel
IS 808	Dimensions for Hot Rolled Steel Beam, Column, Channel & Ange Sections.
IS 1852	Specification for Rolling and Cutting Tolerances for Hot-Rolled Steel Products.
IS 2629	Recommended Practice for Hot-Dip Galvanizing of Iron and Steel
IS 2633	Methods for testing uniformity of coating of zinc coated articles
IS 4759	Hot-dip zinc coatings on structural steel and other allied products
IS 6745	Method for determination of mass of zinc coating on zinc coated iron and steel articles

3. CLIMATIC CONDITIONS OF THE INSTALLATION:

1	Maximum ambient temperature	50 deg C
2	Max. Daily average ambient temp	35 deg C
3	Min Ambient Temperature	0 deg C
4	Maximum Humidity	95%
5	Average Annual Rainfall	150cm
6	Average No. of rainy days per annum	120
7	Altitude above MSL not exceeding	1000m
8	Wind Speed	300 Km/hr
9	Earthquakes of an intensity in horizontal direction	equivalent to seismic acceleration of 0.3g
10	Earthquakes of an intensity in vertical direction	equivalent to seismic acceleration of 0.15g (g being acceleration due to gravity)

TPCODL/ TPNODL/ TPWODL/ TPSODL service area has heavy saline conditions along the coast and High cyclonic Intensity winds with speed up to 300 Kmph. The atmosphere is generally laden with mild acid and dust in suspension during the dry months and is subjected to fog in cold months.

4. GENERAL TECHNICAL REQUIREMENTS:

Sl. NO.	TECHNICAL PARTICULARS	DESIRED VALUE (150 X 150 ISHB)
1	Length of Joist in mtr.	9mtr, 10mtr, 11mtr & 13mtr
2	Make	SAIL/TATA/ RINL/JINDAL/JSW (Billet with re rolling not allowed)
3	Weight in kg/m with $\pm 2.5\%$ Tolerance	34.60
4	Sectional Area (cm ²)	44.1
5	Flange slope in deg	94
6	Cutting length tolerance	100 mm (no negative tolerance)
7	Depth(D) of Section (mm) with +3.0mm/ -2.0mm Tolerance for 150 x 150mm ISHB IS 1852-1985	150
8	Width(B) of Flange (mm) ± 4.0 mm Tolerance for 150 x 150mm ISHB IS 1852-1985	150
9	Thickness of Flange (Tf) (mm) with ± 1.5 mm Tolerance	9
10	Thickness of Web (Tw) (mm) with ± 1.0 mm Tolerance	11.8
11	Corner Radius of fillet or root (R1) (mm)	8
12	Corner Radius of Toe (R2) (mm)	4
13	Moment of Inertia	
A	Ixx (cm ⁴)	1640
B	Iyy (cm ⁴)	495
14	Radius of Gyration (cm)	
A	Rxx	6.09
B	Ryy	3.35
15	Modulus of Section (cm ³)	
A	Zxx (cm ³)	218
B	Zyy(cm ³)	63.2
16	GI Base Plate in mm	300 x 300 x 12
17	GI Stiffener Flange in mm	150 x 60 x 6
18	GI Stiffener Web in mm	150 x 100 x 6
19	Mechanical Properties	
a)	Grade	E-250A
b)	Yield stress in Mpa	250 Min
c)	Tensile stress in Mpa	410 min
d)	Lo= (5.65 So) Elongation %	23 min
e)	Bend test	2t (Shall not crack)

Sl. NO.	TECHNICAL PARTICULARS	DESIRED VALUE (150 X 150 ISHB)
19	Chemical properties	
a)	Grade	E 250A
b)	Carbon	0.23 % Max
c)	Manganese	1.50 % max
d)	Sulphur	0.045 % max
e)	Phosphorous	0.045 % max
f)	Silicon	0.40 % max
g)	Carbon equivalent	0.42 % max
h)	De oxidation method	Semi killed or killed
20	Supply condition	Hot rolled
21	Galvanizing standard	IS 2633, IS 2629, IS 4759
22	The zinc coating (Min 705 gms per sq.mt & Min. 100 Micron at every point) shall be smooth, continuous and uniform. It shall be free from acid spot and shall not scale, blister or be removable by handling or packing. Zinc Coating shall withstand for 6 dips in Dip Test process for RSJ Pole	Min 705 gms per sq.mt & Min. 100 Micron at every point with 6 Dips
23	Fabrication	1. Hole as per GA drawing provided by TPCODL/TPNODL/TPWODL/TPSODL 2. Arc welding to be used for fabrication / jointing of Base plate & stiffener to the pole
24	Embossing	ISI Mark, RSJ 150, Manufacturer Name/ Trade Mark.
25	Stencil Marking (non-erasable) is made on mid-section of each RSJ Poles to be supplied to TPCODL/TPNODL/TPWODL/TPSODL	TPCODL/TPNODL/TPWODL/TPSODL, P.O No and Date of Manufacturing
26	Depth of Plantation Marking (Red Colour)	A strip of 20-30 mm shall be painted with oil paint of red colour, on all over of the pole at a planting depth

5. GENERAL CONSTRUCTIONS/REQUIREMENTS:

The Rolled Steel Joist support structures shall be fabricated from mild steel, grade A and in lengths dictated by design parameters. Supplier has to supply Baseplate with dimension 300mm x 300mm x 12mm thickness along with Stiffener 150x60x6 (flange) & 150x100x6 (web). Complete fabrication drawing shall be submitted for approval. Complete fabrication drawing shall be submitted for approval. Holes should be as per GA drawing provided by TPCODL/TPNODL/TPWODL/TPSODL. However, in case of any discrepancy between the above data & the relevant IS, the values indicated in the IS shall prevail. All the acceptance Tests / routine tests shall be carried out as per relevant IS. The approved makes are SAIL, JINDAL, RINL, JSW & TATA (Billet with re rolling not allowed).

5.1 Galvanization:

RSJ Pole shall be hot dip galvanized, are as following:

- a) All galvanizing shall be carried out by the hot dip process, in accordance with Specification IS 2629. However, high tensile steel nuts, bolts and spring washer shall be electro galvanized.
- b) The zinc coating (Min 705 gms per sq.mt & Min. 100 Micron at every point) shall be smooth, continuous and uniform. It shall be free from acid spot and shall not scale, blister or be removable by handling or packing.
- c) There shall be no impurities in the zinc or additives to the galvanic bath which could have a detrimental effect on the durability of the zinc coating. purity of zinc shall be Zn 99.95% or better.
- d) In the event of damage to the galvanizing the method used for repair shall be subject to the approval of the Engineer in Charge or that of his representative. Repair of galvanization at site will not be permitted in any situation.
- e) The threads of all galvanized bolts and screwed rods shall be cleared of spelter by spinning or brushing. A die shall not be used for cleaning the threads unless specifically approved by the Engineer in Charge. All nuts shall be galvanized. The threads of nuts shall be cleaned with a tap and the threads oiled.
- f) Partial immersion of the work shall not be permitted and the galvanizing tank must therefore be sufficiently large to permit galvanizing to be carried out by one immersion.
- g) After galvanizing no drilling or welding shall be performed on the galvanized parts of the equipment excepting that nuts may be threaded after galvanizing. To avoid the formation of white rust galvanized materials shall be stacked during transport and stored in such a manner as to permit adequate ventilation. Sodium dichromate treatment shall be provided to avoid formation of white rust after hot dip galvanization. The galvanized steel shall be subjected to test as per IS-2633.
- h) Quality of Hot Dip Galvanization should comply with IS 2629, ISO1461 & should be guaranteed for any type of damage due to harsh climatic condition for 5 Years. These poles are to be used in coastal areas of Odisha where climate is hot, humid & saline. These areas are prone to flood & frequent rainfall.

6. MARKING:

Following distinct non-erasable embossing is to be made on each RSJ Poles to be supplied to TPCODL/TPNODL/TPWODL/TPSODL under this Tender.

- a) ISI Mark
- b) RSJ 150
- c) E-250 A
- d) Manufacturer Name/ Trade Mark

Stencil Marking (non-erasable) is made on mid-section of each RSJ Poles to be supplied to TPCODL/TPNODL/TPWODL/TPSODL.

- a) "TPCODL/TPNODL/TPWODL/TPSODL"
- b) P.O No and Date of Manufacturing
- c) Depth of planting (A strip of 20-30 mm shall be painted with oil paint of red colour, on all over of the pole at a planting depth.)

7. TESTS CERTIFICATE:

The bidder shall be required to submit complete set of the following test reports along with the offer:-

7.1 ACCEPTANCE TESTS

- i) Chemical Composition
- ii) Mechanical Properties
- iii) Dimension Test & Weight (kg/M) Visual Examination,
- iv) Test in respect of Hot Dip Galvanization i.e., (Thickness of zinc coating in microns, Mass of Zinc Coating).

7.2 ROUTINE TESTS

Same as Acceptance Test

7.3 TYPE TESTS

- i) Chemical Composition
- ii) Mechanical Properties
- v) Test in respect of Hot Dip Galvanization i.e., (Thickness of zinc coating in microns, Mass of Zinc Coating).

8. TESTS:

The Bidder shall furnish the type test certificates for the tests as mentioned above as per the corresponding standards. All the tests shall be conducted at CPRI/ERDA/ Approved Government Labs by Tata Odisha Discoms as as per relevant IS. Type tests should have been conducted during the period not exceeding 5 years from the date of opening the bid. In the event of any discrepancy in the test reports, i.e., any test report not acceptable, same shall be carried out without any cost implication to TPCODL/TPNODL/TPWODL/TPSODL.

9. PRE DISPATCH INSPECTION:

Equipment shall be subject to inspection by a duly authorized representative of the TPCODL/TPNODL/TPWODL/TPSODL. Inspection may be made at any stage of manufacture at the option of the TPCODL/TPNODL/TPWODL/TPSODL and the

equipment if found unsatisfactory as to workmanship or material is liable to rejection. Supplier shall grant free access to the places of manufacture to TPCODL/TPNODL/TPWODL/TPSODL's representatives at all times when the work is in progress. Inspection by the TPCODL/TPNODL/TPWODL/TPSODL authorized representatives shall not relieve the supplier of his obligation of furnishing equipment in accordance with the specifications.

Material shall be dispatched after specific MDCC (Material Dispatch Clearance Certificate) is issued by TPCODL/TPNODL/TPWODL/TPSODL. Following documents shall be sent along with material

- a) Test reports
- b) MDCC issued by TPCODL/TPNODL/TPWODL/TPSODL
- c) Invoice in duplicate
- d) Packing list
- e) Drawings
- f) Delivery Challan
- g) Guarantee / Warrantee card
- h) Other Documents (as applicable).

10. INSPECTION AFTER RECEIPT AT STORES:

The material received at TPCODL/TPNODL/TPWODL/TPSODL Store/Site will be inspected for acceptance and shall be liable for rejection, if found different from the reports of the pre-dispatch inspection and one copy of the report shall be sent to Engineering department.

11. GUARANTEE:

Bidder shall stand guarantee towards design, materials, workmanship & quality of process/ manufacturing of items under the contract for due and intended performance of the same, as an integrated product delivered under this contract. In the event any defect is found by the Company up to a period of 54 months from the date of commissioning or 60 months from the date of last supplies made under the contract, whichever is earlier, supplier shall be liable to undertake to replace/rectify such defects at his own costs. within mutually agreed timeframe, and to the entire satisfaction of the Company, failing which the Company will be at liberty to get it replaced/rectified at supplier's risks and costs and recover all such expenses plus the Company's own charges (@ 20% of expenses incurred), from the supplier or from the "Security cum Performance Deposit" as the case may be.

Galvanization Guarantee- Quality of Hot Dip Galvanization should be guaranteed for any type of damage due to harsh climatic condition for 5 Years.

12. PACKING:

Supplier shall ensure that all material covered by this specification shall be prepared for rail/road transport (local equipment) and be packed in such a manner as to protect it from damage in transit. The bidder shall provide instructions regarding handling and storage precautions to be taken at site.

13. TENDER SAMPLE:

Not Applicable.

14. QUALITY CONTROL:

The bidder shall submit QAP indicating the various stages of inspection, the tests and checks which will be carried out on the material of construction, components during manufacture and bought out items and fully assembled component and equipment after finishing. As part of the plan, a schedule for stage and final inspection within the parameters of the delivery schedule shall be furnished. The Purchaser's engineer or its nominated representative shall have free access to the manufacturer's/sub-supplier's works to carry out inspections.

15. TESTING FACILITIES:

Supplier/ Manufacturer shall have adequate in house testing facilities for carrying out all routine tests & acceptance tests as per relevant Indian standards.

16. MANUFACTURING ACTIVITIES:

The successful bidder shall submit the bar chart for various manufacturing activities clearly elaborating each stage, with quantity. This bar chart should be in line with the Quality assurance plan submitted with the offer.

17. SPARES, ACCESSORIES AND TOOLS:

Not applicable.

18. DRAWINGS AND DOCUMENTS:

Following drawings and documents shall be submitted in line with the requirement of Tender specifications:

- a) Signed & stamped copy of clause-wise compliance on Technical Specification & Schedule of Deviations.
- b) Work Experience details.

- c) Type test certificates.
- d) Drawing 1 set of Hard Copy & Soft copy PDF File containing complete information about manufacturing.
- e) Signed & stamped copy of pre-bid queries.

19. GUARANTEED TECHNICAL PARTICULARS:

Bidder shall have to comply & submit clause wise compliance of this specification.

20. SCHEDULE OF DEVIATIONS:

(TO BE ENCLOSED WITH TECHNICAL BID)

All deviations from this specification shall be set out by the Bidders, clause by Clause in this schedule. Unless specifically mentioned in this Schedule, the tender shall be deemed to confirm the purchaser's specifications:

Sl. No.	Clause No.	Details of deviation with justifications


We confirm that there are no deviations apart from those detailed above.

Seal of the Company:

Signature

Designation

The shown drawing shall be indicative in nature & will be finalized during detailed engineering:

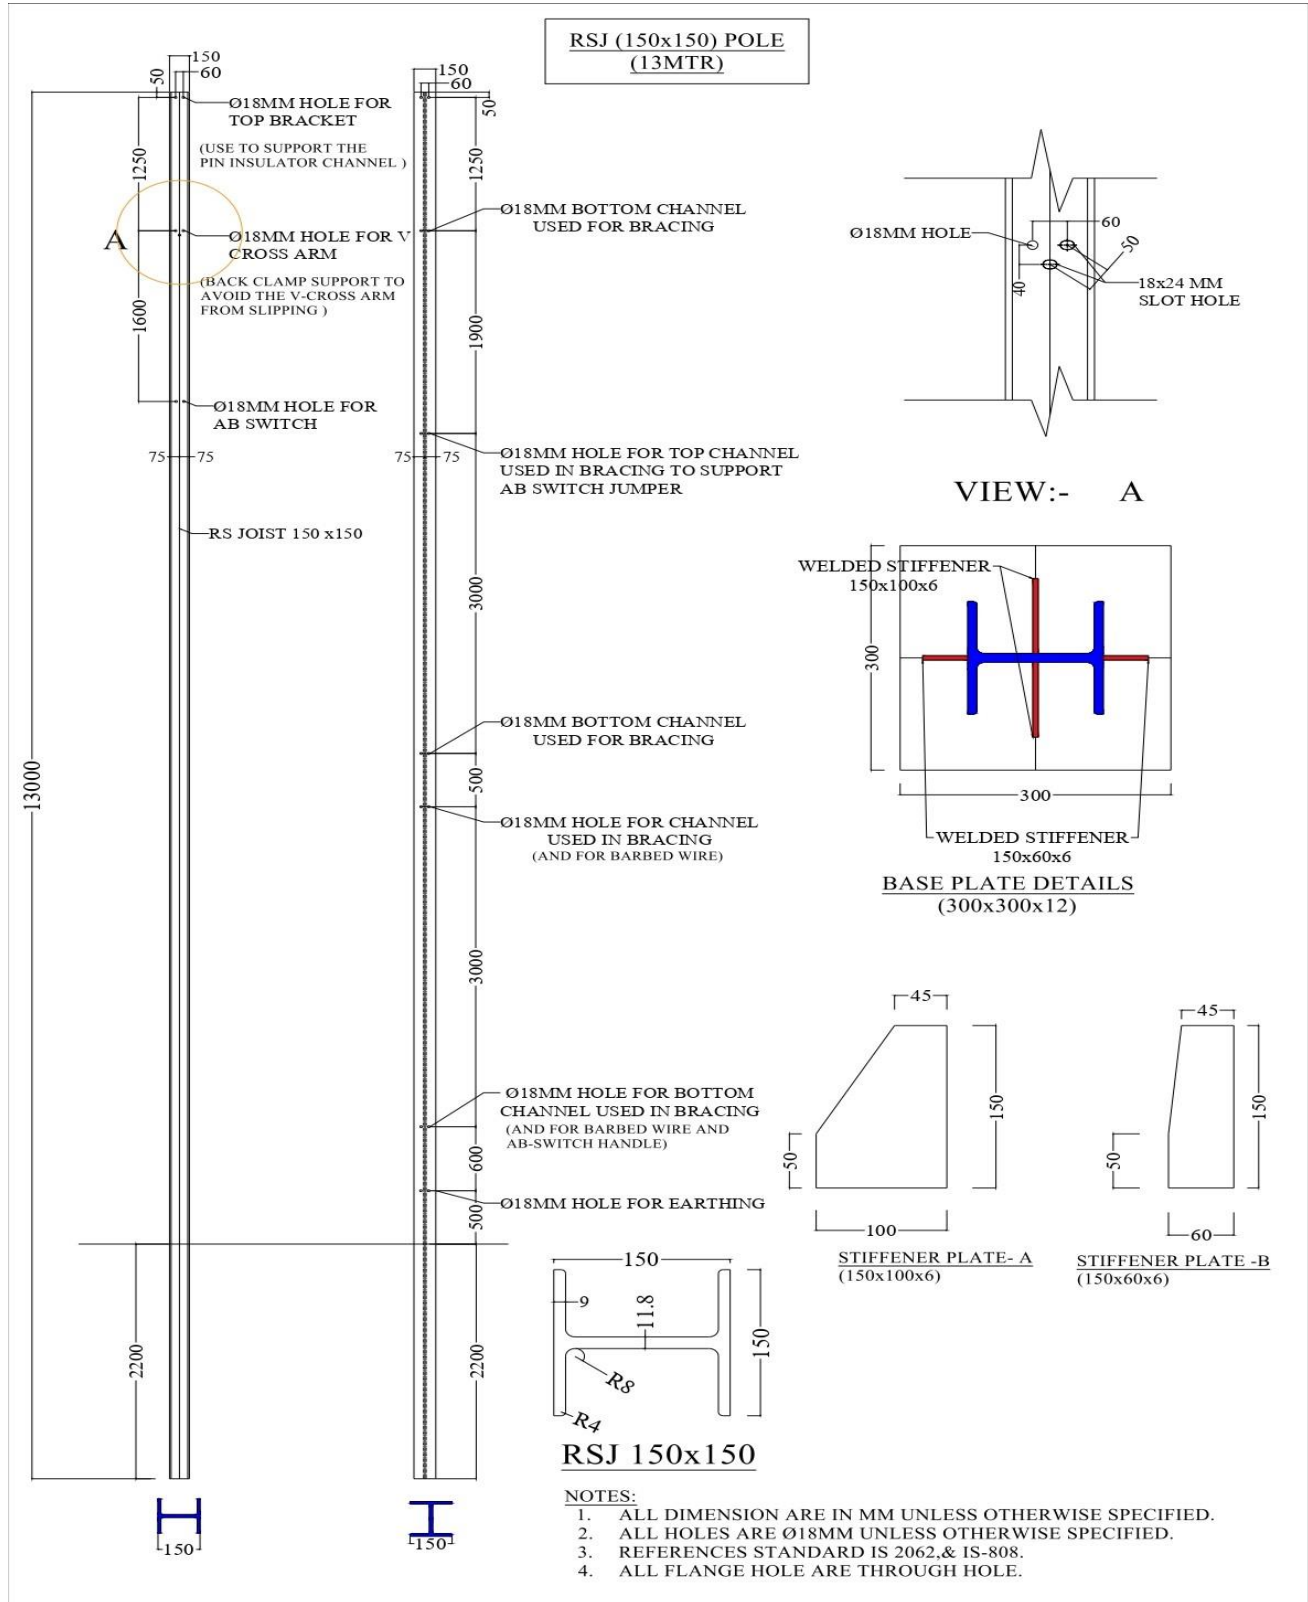

The shown drawing shall be indicative in nature & will be finalized during detailed engineering:

