

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
<i>Document No. TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

Appendix 2:

Safety Terms and Conditions

Reason for Change	Date of Last Revision	Prepared By	Reviewed By	Approved by
Periodic Revision and Inclusion of Procedures and formats from BASCC.	<u>1 Aug 2023</u> <u>(Rev 5)</u>	All Discom and CFT members	Corporate Safety Team	Suresh H Khetwani (Chief safety and Environment)

Corporate Safety Team.

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Clause	Sub-clause	Description	Page No
1.0		Objectives	3
2.0		Scope	3
3.0		Safety Organization & Responsibilities	3
	3.1	Business Associate Site Management and Supervision	3
	3.2	Business Associate Supervisors and General Staff(R6)	4
	3.3	Business Associate Site Safety Supervisor (SSS)(R6)	5
	3.4	Business Associate Workforce	5
	3.5	Business Associate (Vendor) /sub-Vendor	6
4.0		<u>Procedures (R6)-Newly Added.</u>	7
5.0		Tools and Tackles	43
6.0		Site Safety Rules and Procedures	44
7.0		Critical safety Rules and Procedures	44
8.0		General Safety Rules and Procedure	46
9.0		Pre-Employment and Periodic Medical check-up	48
10.0		Other Conditions	48
11.0		Schedule of Safety Audits by BA Safety Staff	49
General Safety Conditions for various contracts Specific to Odisha Discom			
12.0 (R6)	12.1	Safety Conditions for maintenance of STS (Sub Transmission System) Network for Discom	51
	12.2	Safety Conditions for maintenance of 11 KV and LT Network for Discom	52
	12.3	Safety Conditions for the major contract work in Civil Projects for Odisha Discom	53
	12.4	Safety Conditions for the major contract work in Commercial Department like - MMG, RRG, EAG, etc	54
	12.5	Safety Conditions for Major Projects in Distribution Network	55

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

1.0 Objective:

The Objective of Safety Terms and Conditions is to apprise the Business Associates about various expectations from the BA to implement Tata Power Health & Safety Management System without fail.

2.0 Scope:

This procedure applies to all operating and project sites of The Tata Power Company Ltd and Group companies including new businesses like Electric Vehicle charging, Home Automation, Microgrid, Roof top solar etc. This Code of Conduct also applies to all operating and project sites of four Odisha Discoms and New business based on mutually agreed timeline for implementation.

3.0 Safety Organization & Responsibilities

3.1 Business Associate Site Management and Supervision

Each Business Associate will be responsible for fulfilling all statutory and safety requirements as per the laws of the land and not limited to Factory Act, Electricity Act, Electricity Rules and Regulations, Shop and Establishment Act etc.

Each Business Associate shall provide at least one competent full-time safety supervisor for workforce of every 50 workers or less than that. When workforce ranges to 500, the Business Associate must provide at least one qualified safety officer (This may be subjected to change as per applicable act). Thus, for work force of 500 workers there will be one qualified safety officer and 10 safety supervisors. For every 500 additions in workforce, the Business Associate must add 1 safety officer and 10 safety supervisors. The Order Manager or Safety Department of the Tata Power Division /Discoms will review and approve the appointment of all safety officers and supervisors. The safety supervisors/officers will work with the guidance from Tata Power Division /Discoms Safety Department and align themselves with Tata power Division/Discom safety requirements.

For O&M related AMC activities, minimum one qualified safety officer to be deployed for each Division of the Discoms.

(For any specific & specialized work, site safety supervisor will be decided by SCG)(R6)

Qualified safety officer means he or she has completed PDIS or ADIS from a recognized institute.

Site Safety Officer/Safety Supervisor / Safety Coordinator shall be interviewed by the Order Manager/ Safety head of the Tata Power Division/Discom and then gate passes shall be issued if the interview is successful.

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Site Manager of Business Associate /Sub Vendor is responsible, and will be held accountable, for the safety of their own workforce as well as that of sub-Business Associate s. He should also ensure that all equipment, materials, tools, and procedures remain in safety compliance at job site.

Responsibility of Site manager includes, but not limited to:

- 3.1.1 Holding officer/supervisors accountable for safety and actively promote safe work performance.
- 3.1.2 Participate in and cooperate with all safety program requirements to be implemented to meet Tata Power Division /Discoms safety objectives
- 3.1.3 Ensure timely reporting of safety incidents, near misses, unsafe acts, and conditions.
- 3.1.4 Identify the training needs of BA employees and maintain all safety training documents.
- 3.1.5 Provide Safety Performance Report at an agreed frequency.
- 3.1.6 Stopping of unsafe work (Acts and/or Conditions) immediately. Work to start only after corrective actions are implemented.
- 3.1.7 Ensure and participate in daily toolbox talk for all the jobs.
- 3.1.8 Ensure that only tested and certified tools and equipment are issued to the workers and being used at the site.

3.2 Business Associate Supervisors and General Staff.

Business Associate s' site supervisors and general staff members in charge of job site functions such as field engineering, warehousing, purchasing, costing, and scheduling etc. are responsible for the safe performance of the work of those they supervise. They must set an example for their fellow employees by being familiar with applicable sections of the Site Safety program and ensuring that all site activities are performed with SAFETY as the primary objective.

Each site supervisor is responsible and will be held accountable for identifying, analyzing, and eliminating or controlling all hazards through implementation of an aggressive, pro-active Health, Safety and Environmental Program. Each supervisor will proactively participate in the Safety program by observing, correcting, and recording unsafe acts and conditions at plant / sites.

The BA's supervisor is the link between Tata Power Management and the BA (including his employees). (R6)

- He coordinates the work of his company's employee on site and is responsible & accountable for the safety of BA workforce. He will collaborate with site safety supervisor (SSS). BA's supervisor shall review the Safety requirements with his employees prior to the beginning of each job. Documentation of this review shall be forwarded by him to the Order Manager.(R6)

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- Assigning jobs to his workers, inspection of tools, equipment & PPEs , reporting of incidents & near-misses, housekeeping of work area and carrying out Safety Audits.(R6)
- Deployment of all applicable Safety standards & procedure as mention in Safety Term& Condition CSMF2 during execution of the jobs.(R6)
- Ensuring job specific training prior to execution of the job.(R6)
- Conducting Tool - box meeting and compliance of SOP & statutory requirements at work place, correction of all unsafe conditions and acts.(R6)
- BA'S Supervisor will deeply involve in making JSA through participation of work force.(R6)
- BA's Supervisor will invite all BA employees for participation & engagement daily ensuring 100% in either observation reporting, TBT, Mass Meeting and discussion for Risk Assessment & implementation of control measure.(R6)

3.3 BA Site Safety Supervisor (SSS)(R6):

- 3.3.1 SSS will carry out daily safety audit and inspections of tools, tackles, equipment and PPEs. They will identify and help in correcting the unsafe acts and unsafe conditions created while executing job t site with the help of BA's supervisors (R6).
- 3.3.2 SSS will ensure his participations in TBT and Mass Meetings regularly. They will also ensure reporting of all incidents & near-misses and participate in incident investigation (R6).
- 3.3.3 SSS will help in risk assessment of activities while developing SOP for the job (R6).
- 3.3.4 SSS will deeply involve in making JSA through participation of work force.(R6)
- 3.3.5 SSS will assist for participation & engagement of 100% BA employees daily in either observation reporting, TBT, Mass Meeting and discussion for Risk Assessment & implementation of control measure.(R6)

3.4 Business Associate Workforce

- 3.4.1 Business Associate shall provide adequate quality and quantity of manpower as mutually agreed. Generally, for each 10-15 workforce one supervisor is suggested. For all high risk jobs there shall be one Business Associates supervisor shall be deployed.(R6).
- 3.4.2 BA shall arrange to provide mandatory training to BA employee as per capability building as mention in clause 4.4 in this document to get gate pass.
- 3.4.3 Business Associate employees shall be required to attend any other additional training if suggested by Order manager or Site Safety Head. The cost of such additional training shall be borne by the Vendor.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- 3.4.4 Business Associate / Vendor shall mobilize their manpower well in advance to complete the training through TPSDI/Sill development Institute.
- 3.4.5 The Vendor / BA shall arrange or bear the conveyance and food expenses incurred during training of BA employees in Odisha Discom.
- 3.4.6 Supervisors/Welder/Electricians/Line man /Fitters /Radiographers/Riggers engaged by the Business Associate shall have valid competency certificates issued by authorized agency/Institute.
- 3.4.7 Business Associate workforce must make safety a part of their job by following safety rules and regulations and by using all safeguards and safety equipment. They must take an active part in the Safety programs for the Site.
- 3.4.8 Every member of the workforce is expected to report for work without influence of any Drug/Alcohol. Failure to comply with this requirement shall result in immediate termination of employees under the influence of drug and alcohol plus show cause notice/penalty to the vendor.
- 3.4.9 All employees shall report hazardous conditions, practices and behaviours in their work areas and correct wherever possible.
- 3.4.10 Workforce is responsible for active participation in safety and health programs, suggestion systems, trainings and reporting of unsafe act/practices, Unsafe conditions incidents and injuries to their supervisors.

3.5 Business Associate (Vendor) /sub-Vendor

- 3.5.1 Vendors/Business Associate shall always comply with and ensure that their workforce comply with all site safety rules and regulations. Specifically, with applicable provisions of the Site Safety Management Plan and all statutory safety rules and regulations.
- 3.5.2 After receiving the work order/ purchase order vendor/Business Associate /bidder shall not appoint Sub-Business Associate without safety assessment of the sub-Business Associate through safety concurrence group Under Business Associate Safety Code of Conduct. Penalty of 5% of contract value will be applicable to the Business Associate if sub-Vendor is appointed without the permission of SCG and without evaluation through BASCC process.
- 3.5.3 For engaging any sub-Vendor, the Prime Vendor as well as the sub-Vendor should be individually registered with Tata Power. Sub-contracting or hiring of others, by the BA to perform the services is subjected to specific, prior approval by the CA/OM. Such approval shall depend upon compliance with the following minimum requirements (R6)-
 - i. Sub-vendors identified by the Prime vendor will be subject to the same Safety Potential Evaluation Criteria as the Prime vendor for all Medium-risk/High-risk job where supervision will be done by the sub- vendors. In such cases, vendors must have a Star-rating of 4 or above, for becoming a sub- vendor(R6).

The Tata Power Company Ltd Document No. TPSMS/GSR/STC/009 REV 06		Appendix 2 to BASCC Safety Terms and Conditions Date of Issue: 01/03/2024
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

- ii. The SCG team shall evaluate the Safety and technical competency of the sub-contractors for High risk job(R6)
- iii. The Departmental Head will have the authority to approve any sub-contracting process based on requirement as submitted by the Prime Vendor (See CSM F-14 Sub-Vendor Engagement Request Form).
- iv. No Safety potential evaluation shall be conducted for sub-letting of Low risk work(R6).
- v. The Prime vendor shall be fully liable and responsible to Tata Power for the acts, errors, and omissions of its sub-vendors and shall be relieved neither of any obligation to Tata Power under the contract, nor of any other legal requirements(R6).
- vi. The Prime vendor shall use only sub-vendors of demonstrated experience and reliability regarding the services to be provided(R6).
- vii. The Sub-vendor shall agree in writing to be bound by all obligations of the Prime vendor set forth in the Contract.(R6)
- viii. Safety performance evaluation shall be done for both prime vendor & sub-vendor.(R6)

Types of Sub-contracts and Associated Requirements (R6):

- I. Sub - Vendor working with his own supervision:- Sub-vendors must achieve a minimum Star-rating of 3 for performing High risk jobs under Tata Power supervision or under the Principal/Main Vendor (Prime Vendor).(R6)
- II. Sub-vendor working under Prime vendor's supervision (as supplier of manpower):- Manpower-supply contracts have to be supervised by the Prime vendor and the Prime vendor's Star- rating has to be taken into consideration. Vendors supplying manpower need not qualify in the Star-rating assessment.(R6)
- III. 3. Only one level of sub-contracting is allowed, and the use of any sub-vendors must be authorised by Tata Power before any contract is finalised. Sub-vendors shall be subject to the same registration and selection/screening processes, as well as the same Safety performance requirements as those required of all Tata Power vendor's. Sub- vendor details are to be attached to the main contract during the RFQ stage. The process of sub-contracting is to be approved by the Chief / Head of the department (BASCC - Appendix#14).(R6)

4.0 Procedure (R6).

4.1 Registration of Business Associates (Vendors):

For Vendor Registration, Contract Department will issue following documents for evaluation of Business Associate's safety capability.

- 1) **CSM F2 Safety Terms and Conditions (R6):** The document **CSM F2 Safety Terms and**

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Conditions provides the information about Tata Power-Division /Odisha Discom safety System to the Business Associate

- 2) **CSM F3 Safety Category Qualification Form(R6)::** Business Associate will submit the **CSM F3 Safety Category Qualification Form** with all relevant details and documents to Vendor Registration Initiator, which will in turn forward it to Safety Concurrence Group (SCG) for evaluation.

CSM F3 (R6): - Safety Category Qualification form

1. **"Safety Category Qualification Form"** is part of vendor registration form. It needs to be filled by the Business Associate at the time of Registration and should be submitted to Requester / Order Manager with all relevant documents.
2. The same will be evaluated by Safety Concurrence Group of the Division (SCG).
3. Information provided by Business Associate will be verified during site visit.

Safety Category Qualification Form

Please consider my application for

Category A Vendor: Vendor eligible to carry out Very High- and High-risk O&M/Project jobs

Category B Vendor: Vendors eligible to carry out technical jobs, classified as Medium / ~~low~~ risk

Category C Vendor: Vendors eligible for to carry out low or very low risk administrative and office job

Category D vendor: All Consultants, Medical Practitioners or vendors taking job from Tata Power and working from their own premises.

Name of the Vendor:						
Sr. No	Safety Information	Yes / No	Remarks			
1	Certified for i. ISO 45001, ii. ISO: 14001 iii. ISO: 9001 (ISO certificates to be issued from reputed accreditation agencies specified by Tata Power)	i. Y/ N ii. Y/ N iii. Y/ N	If Yes, Attach copy of the certification. If No, mention plan to get the certification.			
2	Safety Statistics for current and Last Three (3) Years - LTIFR	Yes/No	Current Year	Year 1(Last FY)	Year 2	Year 3

The Tata Power Company Ltd Document No. TPSMS/GSR/STC/009 REV 06		Appendix 2 to BASCC Safety Terms and Conditions Date of Issue: 01/03/2024
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

Name of the Vendor:																			
	- LTISR		LTIFR																
			LTISR																
3	Any Compensation paid due to accidents during current and last three years?	Yes/No	<table border="1"> <thead> <tr> <th></th> <th>Amount (INR)</th> <th>Manhour</th> </tr> </thead> <tbody> <tr> <td>Current Year</td> <td></td> <td></td> </tr> <tr> <td>Y1 (Last FY)</td> <td></td> <td></td> </tr> <tr> <td>Y2</td> <td></td> <td></td> </tr> <tr> <td>Y3</td> <td></td> <td></td> </tr> </tbody> </table>		Amount (INR)	Manhour	Current Year			Y1 (Last FY)			Y2			Y3			
	Amount (INR)	Manhour																	
Current Year																			
Y1 (Last FY)																			
Y2																			
Y3																			
4	Any prosecution against you by statutory bodies/clients during last three years due to statutory violations, criminal negligence towards safety and dereliction of duty of care towards your employees? Is any case still pending against you?	Yes/No	If yes, give details. If no, give an undertaking that no case is pending against you and you have not been prosecuted by statutory bodies or clients.																
5	Do you have Safety Policy? Safety Principles? And Lifesaving Rules?	Yes/No	If yes, attach copy of the documents available.																
6	Do you have Safety training process?	Yes/No	If yes, attach safety training process and average training manhour of your employees for the last three years.																
7	Do you have a system for recording, reporting, and investigating all incidents or near misses?	Yes / No	If yes, show the incident statistics of last three years and implementation of CAPA.																

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Name of the Vendor:			
8	Do you have a disciplinary action program against your employees for violation towards safety rules and procedures?	Yes/No	If yes, show the records of disciplinary action taken the last three years.
9	Do you have a reward and recognition scheme for your employees who show exemplary safe behavior and contribute to overall safety improvement at site?	Yes/No	If yes, show the records of Reward and Recognition given during the last three years.
10	Do you engage in safety promotional activities?	Yes/No	If Yes, Show the proof of engagement in safety promotional activities.
11	Have you been recognized or awarded or rewarded by government bodies of clients for showing excellence in safety management in your jobs during last three years?	Yes / No	If Yes, Show proof.
12	Do you provide adequate quality of PPEs to your workmen?	Yes/No	If yes, please provide details of PPE Matrix and if required, samples for inspection.
13	Do you have Safety organization structure e.g., Safety Officers and Safety Committees?	Yes/No	If yes, attach copy of the safety organization structure, details of safety committees and safety professionals.
14	Name and address of sites where work is in progress or worked earlier	Yes/No	Site details to be attached for inspection by Tata Power-Division /DISCOM Officials.

Note: If you respond NO to any of the above questions, you can mention your plan to get the required documents.

I hereby confirm that the information provided above are true. I give my consent to be penalized as deemed fit in case any information given above are found to be false.

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

I will abide the general safety guidelines mentioned in the purchase order / work order and will ensure to prepare and follow site specific safe operating practices in consultation with the site-in-charge and safety professional. I will abide by penalty scheme in case of non-compliance.

Signature :

Name and Designation :

Stamp of Organization :

- 3) **CSM F4 Safety Potential Evaluation Criteria** : The SCG will evaluate the details submitted by the Business Associate based on a predetermined criteria **CSM F4 Safety Potential Evaluation Criteria along with Star Rating(R6)** for Vendor Registration and will determine the category (Category A/B/C/D) for which the Business Associate will be registered. As mentioned in the above criteria, a site visit may also be organized by SCG prior to registration under Category A and B. In case, the Business Associate does not qualify the safety criteria, the Business Associate will not be registered. However, he may apply afresh for registration after 6 months.

CSM F4 - Safety Potential Evaluation Criteria for Vendor Registration (For Information to BA-Not to submit by BA) R6

At the time of vendor registration, vendor will be registered under 4 categories

- 1) **Category A**- Vendors eligible to carry out High risk Jobs
- 2) **Category B**- Vendors eligible to carry out technical jobs that are Medium/~~low~~-risk
- 3) **Category C**- Vendors eligible to carry out administrative and office jobs
- 4) **Category D**- Outsourced Jobs / Consultants /Medical Practitioners / Suppliers etc

For vendors to be registered under **Category A/B**, a safety potential evaluation will be carried out based on following parameters. (Actual **score is safety capability score**)

Star rating criteria score: 5 Star- 90 to 100, 4 Star- 80 to 90, 3 Star- 70 to 80(R6)

Sr No	Description	Weight age (%)	Actual Score
1	Does the service provider have a valid 45001 Certification?	10	
2	<u>Performance Measure: Lead Indicator</u> <u>(Ref to Safety Performance evaluation report CSM F11 (A)</u> <u>Lead indicator score)(R6)</u>	<u>40</u>	
3	<u>Performance Measure: Lag Indicator</u>	<u>20</u>	

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

	<u>(Ref to Safety Performance evaluation report CSM F11 (B) Lag indicator score)(R6)</u>		
4	Has there been any prosecution / conviction for any Contravention regarding safety and Health provision under the factories Act/Electricity Act / BOCW Act and Rules framed there under? If yes Give Zero otherwise 5 Marks.	5	
5	Check the Safety orientation & training process of Service provider- Records of Safety training provided to safety officer/supervisor /workmen during last 1 year as percentage (%) of total employed by service provider ✓ Safety Officer: >80% of employees: 5 Marks, 50 to 79% of employee: 2.5 Marks and <50%: Zero. ✓ Safety supervisor: >80% of employees: 5 Marks, 50 to 79% of employee: 2.5 Marks and <50%: Zero. ✓ Workmen: >80% of employees: 10 Marks, 50 to 79% of employee: 5 Marks and <50%: Zero	20	
6	Check the organizational structure for safety professionals & engineers / supervisors. ✓ Check Availability of number of Safety Supervisor from government recognized institute as per workforce strength. 1 in 50 employees than 5 Marks <u>otherwise Zero.</u> (R6)	5	
	Total	100	

Evaluation Criteria for Category C

Sr no	Description	Weight age (%)	Actual Score
1	Does the Business Associate have a valid ISO 9001 certification?	40	
2	Check the Safety statistics of Service provider (If available than 10 otherwise Zero)	10	
3	Check the trend LTIFR/LTISR for last 3 years (If less than 0.2 than give 20 Marks if between 0.2 to 0.3 than give 10 marks and otherwise Zero	20	
4	Has there been any prosecution / conviction for any Contravention regarding safety and Health provision under the factories Act/Electricity Act / BOCW Act and Rules framed there under? If yes Give Zero otherwise 10 Marks.	10	
5	Check the Safety orientation & training process of Service provider- Records of Safety training provided to safety officer/supervisor /workmen during last 1 year as percentage (%) of total employed by service provider ✓ Safety Officer: >80% of employees: 5 Marks, 50 to 79% of employee: 2.5 Marks and <50%: Zero.	20	

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

✓	Safety supervisor: >80% of employees: 5 Marks, 50 to 79% of employee: 2.5 Marks and <50%: Zero. Workmen: >80% of employees: 10 Marks, 50 to 79% of employee: 5 Marks and <50%: Zero		
	Total	100	

Evaluation Criteria for Category D

Category D does not require any evaluation as it is for outsourced job outside the Tata Power company premise.

For vendor to be registered for any category, vendor's safety capability score should be $\geq 70\%$.

4.1.1 Star Rating(R6):

SCG will evaluate Star Rating as per following -

- Initially potential Star Rating based on **CSM F4 Safety Potential Evaluation Criteria**
- After 6 month actual star rating assessment to be carried out based on **CSM F4 Safety Potential Evaluation Criteria** and safety performance evaluation.
- Odisha Discom & New Business Star Rating process will be applicable only 1 year after implementation of it.
- Based on Safety capability score Vendors rating will be evaluated (For 3 star rated vendors - within 12 months from previous assessment date and for 4 & 5 Star rated vendors – within 24 months from previous assessment and Re-assessment within three months from previous assessment date when a vendor is unable to achieve Star rating 3)
- Category A - Vendor must require [Safety Star Rating 4](#) and above.
- Category B - Vendor must require [Safety Star Rating 3](#)

Star Rating will be evaluated by Third Party from FY 26

4.2 Contract Preparation(R6).

Safety bid Evaluation will be done only for medium and high risk (R6). The RFQ will be attached with **CSM F2 Safety Terms and Conditions which includes following Documents**

- 1) CSM F6 Safety Competency Assessment Form
- 2) CSM F8 PPE requirements
- 3) CSM F9 Site Safety Management Plan Job Specific Safety Requirement (Educational and Professional Qualification, Skill & Experience Manpower, Tools, and Tackles, e.g., man lifter, use of drone, use & availability of rescue kit, Work

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
<i>Document No. TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

Methodology

etc.)

Safety bid evaluation will not be done for category C and D.

BA shall submit duly filled **CSM F6 Safety Competency Form** along with the bid. SCG will evaluate the document as per the **CSM F7 Safety bid evaluation criteria**. **Site Safety Management Plan CSM F9**, defining the complete procedure of executing the job at site will be signed by the Business Associate and SCG after mutual agreement. BA will attach a copy of Site Safety Management Plan along with PO to the successful bidder. Please refer **CSM F5 Process Flow Chart for issuing RFQ and PO significant health and safety risk associated with it**.

CSM F6 - Safety Competency Assessment Form (Template)

Name of the Vendor/Bidder:

Name of the Sub Vendor (If job is given to Sub Vendor):

Description of the Job:

Request for Quotation (RFQ) No.:

Vendor/Bidder to mandatorily provide the below safety competency related information:

1. Proposed Manpower Deployment Schedule : -

Type of manpower	Qualification	Experience	Month 1	Month 2	Month 3
Project /<u>AMC</u> <u>Manager()</u>						
Site In Charge						
Safety Manager						
Safety Officer						
Supervisors						
Technicians						
High Skilled workmen						
Skilled workmen						
Semiskilled workmen						
Lineman						
Helpers						
Drivers						
Unskilled						

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

<u>Others()</u>						
-----------------	--	--	--	--	--	--

Instruction to Bidders:

- Indicate the overall site manpower deployment schedule as above
- Indicate direct or subcontracted employees by using color code given below:

Direct Bidder Employee – Green

Partly Direct / partly Subcontracted – Yellow

- 4.1.1 Subcontracted – Red** If subBusiness Associate detail is not available at stage of Bid evaluation, then this can be agreed with Order manager or Engineer in charge before deployment Ensure that all sub-Business Associate s follow the Tata Power Safety Procedure and agreed CSM F9 Site Safety Management Plan.

- Against each category, indicate minimum educational qualification and work experience
- Add rows to include other specialized manpower, if any.
- Extend columns to cover the entire duration of the proposed contract.
- If the operation is in shifts, then indicate shift in charge and / or safety officers required for each shift operation.

2. List of Tools, Tackles, Machines and Equipment: -

Bidder/ Vendor to provide the list of tools, tackles, equipment **to be used during the job / project execution**. Bidder/Vendor to ensure that all the lifting tools and tackles, pressure vessels are duly certified by the competent person authorised by the Chief Inspector of Factories of the respective state prior to start of the job

Sr. No	Description of Tools / Tackles	Capacity / Rating	Quantity	Make	Year of manufacture	Remarks
1						
2						
3						
4						
5						
.....						

3. Safety Records:

Bidder to provide the details of fatalities and lost workday cases (LWDC), occurred in last three years (data to be provided for the last completed FY and preceding 2 years).

Description	Safety Data for current and Last 3 Years			
	Current Year	Year 1 (Last FY)	Year 2	Year 3
		20__ - __	20__ - __	20__ - __
Fatalities (Nos.)				

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Lost Workday Cases (Nos.)				
---------------------------	--	--	--	--

In case of no fatalities, LWDC during any year, the form may be filled stating NIL against the respective year. Bidders are encouraged to also submit the RCA / incident investigation reports and the learning's implemented out of the above reported incidents

4. **Job Safety Plan/ Method Statement:**

Bidder to provide / enclose a detailed Site/Job Safety Plan along with a Method statement detailing the execution philosophy (how the bidder intends to execute the Job/Project), identifying all key activities which are required to be performed by the Business Associate at Site. Bidder to also list down all high-risk activities and provide the Hazard Identification and Risk Assessment (HIRA) for all such high-risk activities involved in the site work.

(Use Method Statement template attached as Appendix 9)

5. **PPE Requirement -**

Division/DISCOM Requirement	Bidders Response
The Bidder/Vendor shall ensure that all PPE of Approved standards as per CSM F8 – PPE Requirements shall be always available and shall be used by his employees with no exception whatsoever. Bidders to also ensure Standard PPE matrix of Tata Power to be followed for all activities.	
10% Buffer stock of PPEs to be provided by bidders at each circle to meet any contingency	
Bidder will ensure that sample PPEs to be submitted/approved by Safety Department along with EIC at the time of submission of Safety bids for evaluation In case bidder manpower found using substandard or any PPEs which are not approved by the Tata Power-Division /DISCOM representative, then Tata Power-Division /DISCOM will provide the same to manpower deployed at the cost of bidders.	

6. **Vehicle Deployment:** Bidders to provide details of all vehicles deployed during execution of work-()

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

S. No.	Vehicle No.	Vehicle Type	Location	EV/CNG/Diesel/Petrol	Year	Whether CNG endorsed on RC

- 7. Crane Deployment**-(): Bidders to provide details of crane to be deployed during the execution of work as and when required. Bidders to provide approved new gen crane ACE Model SX150, ACE FX150 and Escorts Model TRX 1550.

Sl No	Crane No	Location	Year

- 8. Training Records**-(): Bidders to provide training records of employees deployed for the execution of work during last one year. These training includes OHS (Occupational Health and Safety) Training, Training on SOP/Work Procedures and Medical Emergency trainings imparted at their own facility, cost, and expenses. Bidders to provide the following details:

Tata Power-Division /DISCOM Requirement	Bidders Response
Training records of employees at their own facility, cost, and expenses for last one year	
Training facility available with Bidders	
Future road map for enhancing the competency of workforce	

- 9. Rewards and Recognition**-(): Bidders to provide the details of process deployed in their organization for sharing and resolution of safety concerns raised by their employees. Also, bidders to provide the details of Rewards and Recognition process in their organization for safety to encourage the morale of their workforce.

10. Management System Certification: -

Sr.No	Certification	Yes / No	If Yes, Year of Certification	If No, Target date for Certification
1	ISO 9001			

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

2	ISO 14001			
3	ISO 45001			
4	Any other (Specify....)			
Note: Please attach certificates to support above. In case not accredited for above but applied for, application letters may be attached.				

CSM F7 Safety bid evaluation criteria. If any specific condition related to Contract is required to be conveyed to the Business Associate, Site safety team will attach the same as Annexure for specific conditions of job and submit it to contract team along with safety bid evaluation form. Commercial bid of Business Associate will be considered for evaluation by contract team only if Business Associate is qualified in safety bid. Site Safety Management Plan, defining the complete procedure of executing the job at site will be signed by the Business Associate and SCG after mutual agreement. Contract shall attach a copy of Site Safety Management Plan along with PO to the successful bidder.

CSM F7 - Safety Bid Evaluation Criteria (For Information to BA-Not to submit by BA) (R6)

Safety Bid Evaluation will be based on following parameters.

Evaluation Criteria

S. No.	Description	Max Marks	Criteria for evaluation
1.	Qualification and Experience of manpower	15	As per Clause No. 1 <u>CSM F6 (R6)</u>
2.	Tools and Tackles to be provided by bidder	15	To be evaluated as per approved tool list of concerned departments.
3	PPE Requirements	5	To be evaluated as per approved PPEs standard and PPE Matrix specified in <u>CSM F8.(R6)</u>
4	Job Safety Plan/ Method	15	To be evaluated as per as per SOP/WI/HIRA
5	Vehicle Deployment	5	<u>Weightage will be given for CNG/Electrical Vehicles with endorsement of CNG kit on RC (R6)</u>
6	Crane and Mechanized heavy equipment Deployment	15	<u>Date of manufacturing or running hours or stipulated in laws.(R6)</u>
7	Training Records	5	Training records to be evaluated with evidence and scoring to be done as per availability of records
8	Certificate Accreditation	5	ISO 9001-2.5 Marks ISO 45001- 2.5 Marks ISO14001- 2.5 Marks. Total Max 5 Marks for all Three

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

9	Safety Initiative for learnings implemented in accidents in organization and work force (Fatal / Non-Fatal)	15	Maximum 15 marks will be awarded for visible evidence in terms of safety initiative deployed based on learning of accident in organization and workforce in case of accident
10	Rewards and Recognition Process	5	Maximum 5 marks will be awarded for R&R process evidence
Total		100	

Safety Records (Lag Parameter)-

1.	Fatal Accident	(-) 10 Marks for each case with max of 15 marks	For any fatality in Tata power /Other company in Current and last three years 10 marks will be deducted with maximum up to 15 marks. For new entrant BA, these marks will be deducted for Past safety records. If and BA found hiding such facts, then contract will be terminated immediately during the execution stage.
2	LWDC (Non-fatal)	(-) 5 Marks for each case with max of 10 marks	For each LWDC (Non-Fatal) case in Tata power /Other company in Current and last years, 5 marks will be deducted with maximum up to 10 marks. For new entrant BA, these marks will be deducted for past safety records. If and BA found hiding such facts, then contract will be terminated immediately during the execution stage.

Final Qualifying Criteria

S. No.	Description	Max Marks	Criteria for evaluation
1.	Qualified Bidders	More than 70 marks	Marks Obtained. 60 Marks for New business-like Odisha Discom for one year from CSCC implementation date.

		Minimum Requirement	Weight age (%)	Score Obtained
Manpower	Safety Officer (1 per 500)	Qualification - Safety Officer shall possess recognized degree in any branch of engineering with practical experience in similar industries of Min 2 years and Advance Diploma In Industrial	5	

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

	workers) or as per requirement	<p>Safety by State technical board. (Each state government prescribes the qualification of safety officer.). Require knowledge of Local language.</p> <p>Experience- Minimum 2-year experience in relevant field as mentioned in the job in PR.</p>		
	<p>Safety Supervisor (1 per work site up to max. 50 workers)</p> <p><u>(For any specific & specialized work, site safety supervisor will be decided by SCG)(R6)</u></p>	<p>Qualification- Supervisor shall possess ITI/ Diploma in relevant field. PDIS is desirable, but not mandatory. Require knowledge of Local language.</p> <p>Experience- Minimum 5-year experience in relevant field as mentioned in the job in PR.</p> <p>Training – Trained and certified by Tata power Skill development Institute or equivalent institute in relevant safety procedures.</p> <p>Note: On request of the Business Associate /Users -TPDSI should vet & certify the skilled & experienced Technician if Technical Qualification is not adequate.</p>	5	
	Qualified Technician (Skilled workers as electrician, rigger, fitter, welder, cable jointer, line men etc.)	<p>Experience- Minimum 2-year experience (or experience prescribed by state government) in relevant field as mentioned in the job in PR.</p> <p>Training – Trained and certified by TPSDI or equivalent institute in relevant safety procedures.</p>	5	
Tools & Tackles	Equipment / Machines/ Tools & Tackles (lifting and shifting tools)	<p>The list of Equipment /Machines / Tools and tackles to be used for job to be submitted by the Business Associate .</p> <p>Evaluation of the list will be carried out based on</p> <p>1) Suitability as per the relevant job</p>	15	

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

		2) Make and age of the tools from authorized agencies defined by the user. 3) Certification by the competent authority of respective state.		
--	--	------------------------------------------------------------------------------------------------------------------------------------------------	--	--

CSM F8 - PPE requirements

The Business Associate shall ensure that the following PPE of Approved standards shall be always available and shall be used by his employees with no exception whatsoever. • PPE shall be conforming to BIS/DGMS/DIN specifications, in good condition and shall be comfortable to his employees, when used. This is indicative. For better clarification refer PPE procedure- **TPSMS/GSP/PPE/023**. as per safety terms and condition Appendix 3 CFM 3 in detail.

PPE Requirement

1	All Business Associate 's employees at site	Safety Florescent Jacket (orange color), Safety helmet & safety shoes with composite or steel toe cap
2	Workers mixing asphalt, cement, lime / concrete	Safety goggle & protective Hand gloves and footwear, Nose mask.
3	Welders / Grinders/Gas cutters	Welding screen/goggles, safety shoes, leather hand gloves, aprons, leg guard
4	Stone breaker	Protective goggle, hearing protection, anti-vibration hand gloves and Protective clothing.
5	Electricians / Linemen	Rubber hand gloves <i>with correct voltage rating and expiry date normally one year from Manufacturing date-()</i> & Electrical resistant shoes, Safety helmet with induction strip to alert about presence of voltage for those linemen who climb the poles or work on electrical equipment
6	Workers working at a height of 1.8 Meter or above.	Double lanyard full body harness, fall arrestor and safety net made of reinforced nylon fiber ropes firmly supported with steel structures, Work positioning attachment

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

PPE Type and Testing Frequency

Sl. No.	Name of PPE	IS / EN Standard	Testing Frequency	Remarks
01	Leather Safety Shoes (Color – Black) with PU toe cap.	IS:15298 (Part-2)	Monthly and visual check every day for any crack or damage in the leather or sole.	
02	HDPE Safety helmet with chin strap and ratchet type for adjustment for non-Electrical work	IS:2925-1984	Monthly and visual check every day for any crack in shell.	
03	Full body harness (Safety belt)	EN 361	Monthly and visual check every day of the bends and the harness.	
04	Electrical Safety Gloves	EN: 60903 CE marked	Weekly and visual check for any crack and blow test before every work.	Manufactured not beyond 12 months.
05	Full face visor with safety helmet	EN: 166 CE marked (Visor)	Monthly and visual check every day for any crack in shell.	Clear acrylic visor attached with safety helmet.
06	Fireproof jacket for chest protection		Monthly and visual check every day.	
07	Safety helmet with induction Strip for linemen and working for electrical work- Class E	EN 397/2012	Monthly and visual check everyday	Induction Strip alerts presence of voltage
08	Shorting clamps, crocodile clamps, Discharge Rod and Neon tester		Monthly and visual check everyday	For discharging the residual voltage and test before touch


Pictorial View of PPEs for reference purpose

Sl. No.	Name of PPE	IS / EN Standard	Picture
---------	-------------	------------------	---------

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

01	Leather Safety Shoes (Color – Black) with PU toe cap.	IS:15298(Part-2) and with test report of electrical resistance.	
02	HDPE Safety helmet with chin strap and ratchet type for adjustment for Nonelectrical work and electrical work	IS:2925-1984/ EN 397/2012	
03	Full body harness (Safety belt) The straps at shoulder and thigh shall have full pad for comfort. The back shall be so designed that harness straps do not tangle with each other.	EN 361:2002 EN 358 : 2000 IS: 3521:1991/2002	
04	Electrical Safety Gloves – Composite type Soft electrical gloves as per size of individual.	EN: 60903 CE marked	
05	Full face visor with safety helmet	EN: 166 CE marked (Visor)	
06	Fireproof jacket for chest protection		

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

08	Reflective jacket to each workman	As per Tata Power standard	
----	-----------------------------------	----------------------------	-------------------------------------------------------------------------------------

These pictures are indicative. Actual product may vary.

Note:

1. Any other Personal Protection Equipment required beyond above list will be according to BIS or EN Standards.
2. All Personal Protection Equipment will be checked by the engineer in-charge or SAFETY group of company.
3. Safety Representative of the BA must maintain the record of the availability, condition and checking of the PPEs.
4. All tools required as per the contract must be according to respective IS / EN standards.
5. Company may revise or add the above list of PPE and their specifications as and when feel necessary. The information about new specifications /models will be circulated by the Engineer In-charge (EIC), which shall adhere by the business associated in the shortest possible time. The EIC shall issue a memo / instruction to BA with timeline for implementation. Any delay will be treated as non- compliance / safety violations.

CSM F9 - Site Safety Management Plan / Method Statement

Site Safety Plan / Method Statement (Template)

This Method Statement describes the specific safe working methods which will be used to carry out the described work. It gives details of work procedure with control measures to counter health and safety issues related to this work. The listed content of this Method Statement can be changed/modified subjected to job scope / specifications, but task specific method statement once finalized & approved, that should not be modified during work execution without permission from the approving authority.

Project/Job Name	
Scope of work: -	
Drawing References: -	

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Detail of Sub Business Associate s involved: -		
Method Statement Prepared By: - Designation: - (e.g., Site Manager)	<u>Signature</u>	<u>Date</u>

1.0 Introduction (*Describe purpose of the work, give details of type and scope of work being carried out*)

--

2.0 Location of Work (*Give site address and precise location on site where work is to be carried out*)

--

3.0 Safety Document /Specific Approval Required (*Details of any safety documents or specific approval i.e., Client specific approval required to undertake the work*)

--

5.0 Role & Responsibilities of Personnel/Parties Involved in activities: *Clearly define roles and responsibilities of all personnel involved in activity i.e., Site management staff including sub-Business Associate s' staff, Project Manager/Site Manager of principal Business Associate , Sub Business Associate Site Manager, Project Engineer, Safety officer, Competent Supervisory Staff etc.)*

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

6.0 Working/Activity Description: - *It is important that all operatives should have clear idea of those operational sequences and responsible supervisor must verify their competency prior to their engagement in operation.*

6.1 Pre-Working Checks

6.2 Resources (Equipment, tools including manpower) Details *i.e., Equipment and Tools, specific operational equipment, test kits, lifting resources, Details of materials to be used in operation, including any reference to COSHH assessments in case of use of any chemicals, Details of the manpower allocated to the task, e.g., titles, qualifications, competences, direct manpower, Business Associates. Details of plant, tools, and equipment to be used for the work, including the availability of relevant statutory documents, checks or inspections etc. Details of fencing, barriers, cones, chains, dangers notices, warning signs etc.*

Tools required for work:

Sr.No	Tools /Equipment /Machine	UOM	Required Qty.	Remark
1				
2				
3				
4				
5				
6				

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

7				
8				
9				
10				

6.4 Operational Sequence of work: - Full description of the work, setting out the methodology in a sequential manner, including any reference to any identified operational restraints. Also refer here sec. 5.0 responsibilities part for every step of work sequence).

S. No	Activity	Details of job sequence	Risk Involved	Control Checks
1.				
2.				
3				
4				
5.				

6.7 Final Checks & restoration of work area after completion of work: Those checks to be carried out by responsible supervisor in witness of his line hierarchy by use of specific checklist of certain operational checks and once those completed satisfactory, PTW (if applicable) to be closed and isolation arrangements to be restored by removing barricades/cautionary tags.








7.0 Task Specific Hazards: - Refer to Task Specific Risk Assessment and attach in appendix

Attachment: - Specific Risk Assessment

In addition, please provide below control measures in risk assessment (as applicable).

Fall Protection Measures: (Where Work at height cannot be avoided)	
--------------------------------------------------------------------	--

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Control Measures for Electrical Hazards							
Others Hazard if any (please provide details)							
Hazardous Substances to be used in job: (Attach MSDS if required)							
	Y/N	Y/N	Y/N	Y/N	Y/N	Y/N	Y/N

7.0 Emergency Provisions: *Relevant operational possibility of a programme in the case of emergency situation i.e. electrical supply restoration. In addition, emergency response provisions i.e., first aiders, firefighting, and first aid arrangements, nearest onsite/offsite emergency response also to be considered during emergency planning.*

8.0 "5S issues" / Waste Disposal/ Housekeeping and Environmental issues: *Details waste disposal processes and or housekeeping activities, Details of environmental impacts and control measures.*

--

9.0 Personal Protective Equipment (PPE): *Tick on PPE requirements for the task/Job*

<i>Safety Helmet / Hard Hats</i>		<i>Safety Shoe / Safety Boots</i>	
<i>Gum Boot</i>		<i>Double Lanyard Safety Harness with work positioning attachment</i>	
<i>Electrical Hand gloves</i>		<i>Other hand gloves</i>	
<i>Eye protection</i>		<i>Respiratory protection</i>	
<i>Ear Protection</i>		<i>Electrical Arc flash suit</i>	
<i>Chemical resistant suit</i>		<i>Reflective Jackets</i>	
<i>Any Other</i>		<i>Any Other</i>	

10.0 First Aid facilities and Nearby Hospitals Details


- Name of On Site First Aider
- First Aid Box Location
- Location of nearest hospital

11.0 Occupational Health, Fitness and COVID-19 related Preparedness:

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- Please give a brief writeup / methodology of your organization's plan to avoid impact of the COVID-19 pandemic at Tata Power working site.
- Please give brief details of occupational health and hygiene related interventions planned by your organisation to ensure good health and fitness of workforce at Tata Power site.

4.3 Contract Award - refer CSM F5 Process Flow Chart for issuing RFQ and PO.

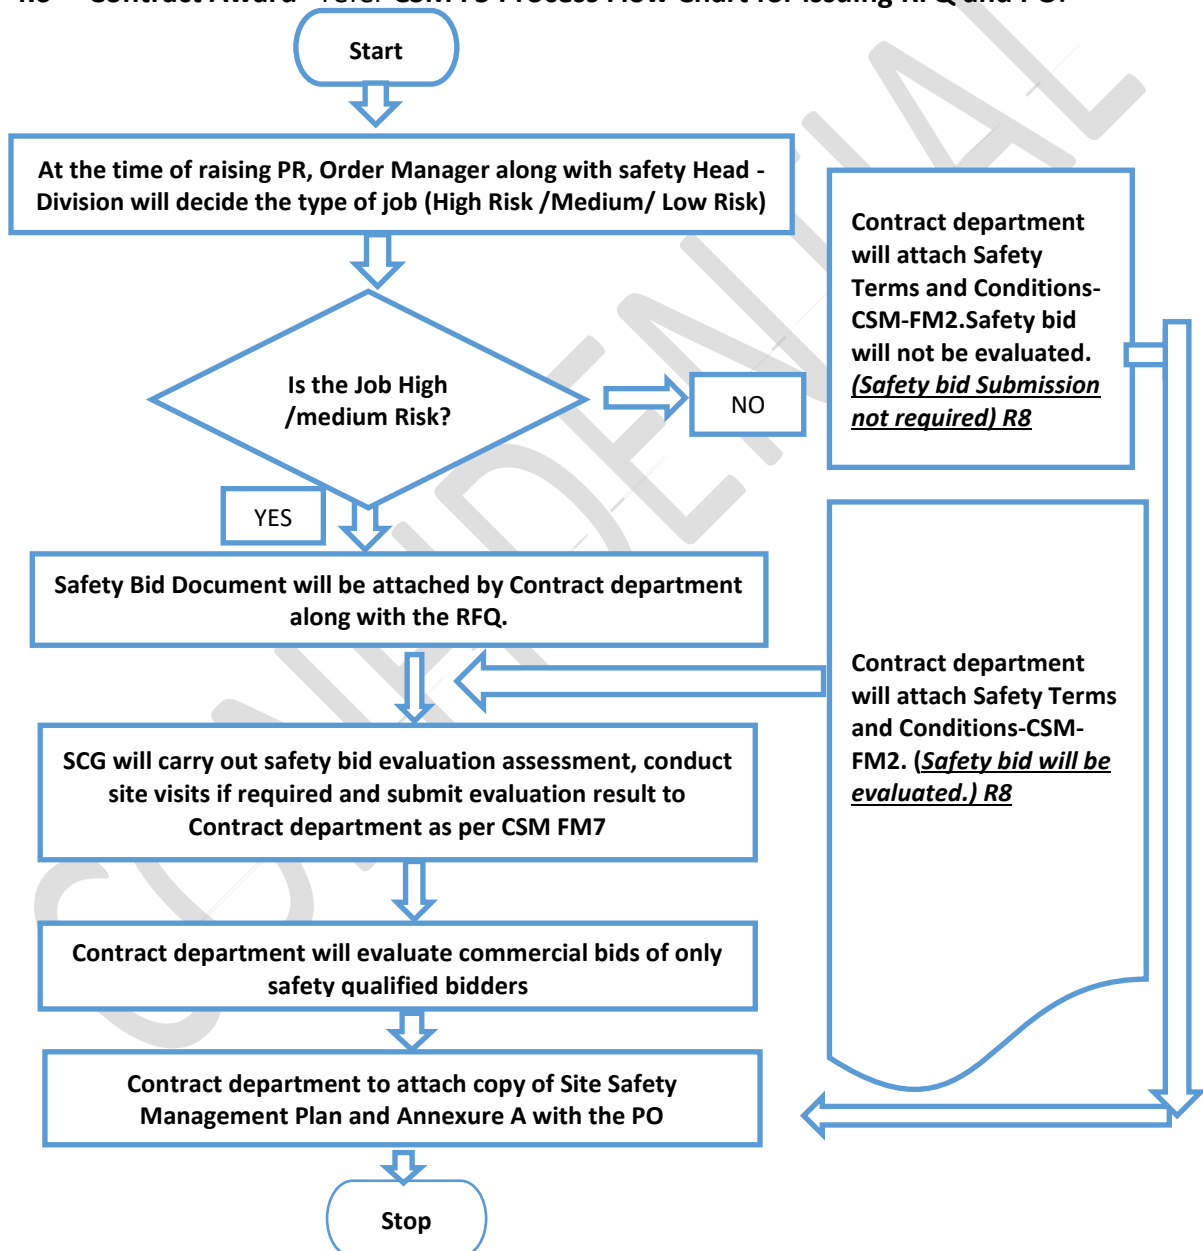

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

4.4 Capability Building:

- **Importance of Capability Building:** Safety training and capability building are crucial parts of the safety management program.
- **Compliance with Requirements:** All necessary training must be provided and documented according to Tata Power's specifications and Indian regulations.

4.4.1 Before issuing gate pass:

4.4.1.1 For Odisha Discom/New business (R8): For up to one year after release of this framework or start of project or till change of new contract whichever is earlier. After that follow clause 4.4.1.2

- **Mandatory Safety Orientation:** All Tata Power Business Associate and sub-Business Associate Employees must attend a Site Safety Orientation Training to obtain a Safety Training Card. *(Safety Training card will be issued by Skill Development Institute)*
- **Gate Pass Requirement:** The Safety Training Card is necessary to receive a Gate Pass for site entry.
- **Duration of Training:** The orientation course lasts at least half a day.
- **Orientation Content:** The training covers information regarding organization, works and responsibility, Hazards, Risk and control measures job rules/Golden rules, safety code of conduct, hazard reporting, injury reporting, emergency procedures, safety activities and programs, disciplinary measures, incentives, and critical safety procedures relevant to the job.

4.4.1.2 For Tata Power Divisions:

All Tata Power Business Associate and sub vendor employee is required to attend LO in case of non-technical and working always in Low-risk area. Or L- Comprehensive Training to receive a Safety Training Card, which is required to obtain a Gate Pass to the site, prior to entry.

4.4.2 Before start of actual work:

- **L-Comprehensive Training:** Business Associates must ensure that workers receive sufficient training before starting work. Supervisors and BA employees /Workforce receive L-Comprehensive training (as outlined in Competency Skill Matrix Annexure - 15) to ensure they can perform their jobs safely. This training is provided by TPSDI or any approved skill institute for the BA employees. Post-training, assessments are conducted by a panel of at least two members for competency of all. BA employees and Supervisors who pass this assessment receive a certificate (card) valid for three years. After three years, workers must undergo re-training and re-assessment.

<p>The Tata Power Company Ltd</p> <p>Document No. TPSMS/GSR/STC/009 REV 06</p>		<p>Appendix 2 to BASCC Safety Terms and Conditions</p> <p>Date of Issue: 01/03/2024</p>
-------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------

- **Certification:** Certificates (cards) (Bronze, Silver, and Gold) are issued based on competency demonstrated in the assessment, not merely on the completion of training
- **Assessment Timing:** Conduct assessments after L-Comprehensive training.
- **Failure Consequence:** Remove BA employees who fail the assessment from Tata Power premises.
- **Bronze Card BA Employees:** Can assist those with silver or gold cards.
- **Silver Card BA Employees:** Can work under competent supervisors.
- **Gold Card BA Employees:** Can work independently (only in Distribution/Discom Business)
- **Bronze card supervisors:** Can supervise low risk job after one day L3 training at Division. One day training will be conducted at Division by safety Head.
- **Silver Card supervisors:** Can supervise all Jobs after one day L3 training at Division. One day training will be conducted at Division by safety Head.
- **Gold Card Supervisors:** Can Supervise all jobs as well as take permits if authorized mainly in Distribution/Discom Business after one day L3 training at Division. One day training will be conducted at Division by safety Head.
- **Certification Renewal:** Recertify L-Comprehensive 3 days program after expiry.
- **Revalidation Tests:** Conduct quarterly or half-yearly L-Comprehensive revalidation tests for BA employees, especially in Odisha and new business areas for up to one year after release of this framework or start of new project or change in existing order whichever earlier.
- **Competency Assessment:** Conducted by Order Manager/Line manager, Safety In-charge/safety officer, and TPSDI during L-Comprehensive, training, on the same day as training completion. Assess all critical BA employees within the training timeframe.
- **Training Expenses:** BA covers the cost of conveyance, food, training, salaries/wages, boarding, and lodging for their staff. Training is offered on a nominal chargeable basis decided by TPSDI or mentioned in PO terms and condition. L0 training is one day, L-comprehensive training is three days training.

4.4.3 **Recognition to the Prior Learning in Safety**

L-Comprehensive exemption based on safety competency.

- **Recommendation and Satisfaction:** If the "Order Manager" recommends and the "Head of the Safety Department of Division/Discom" is satisfied with a BA employee's (this include Expert Engineer/Supervisor/OEM Technician only) safety knowledge and competency, an assessment (Interview) can be conducted to ascertain safety knowledge.
- **Assessment by TPSDI/Recognized SDI:** Tata Power Skill Development Institute (TPSDI) or other recognized/Approved institute by Corporate Safety will conduct the test to assess knowledge in safety.

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- **Exemption from Training:** Employees who pass the assessment (interview) are exempt from attending L-Comprehensive training.
- **Nominal Charges:** The assessment is conducted on a nominal fee, with rates determined by TPSDI periodically.

4.4.4 Process Guidelines(R6):

- No competency certificate will be issued to critical BA Employees /workforce/Supervisors listed in the skill matrix without completing L-Comprehensive training.
- Competency assessments are conducted immediately after completing the L-Comprehensive training.
- The interview panel must include at least two members: TPSDI/Division Safety Head/Officer and a representative from the Order manager/line function.
- Training cards will not be issued without a competency assessment.
- Technical questions for the BA employees will be provided by the order manager/line function, while safety-related questions will be provided by corporate safety.
- The Division Safety Head/Officers will coordinate interviews with support from TPSDI and the line function.
- Corporate safety members are not required to be on the interview panel.
- Separate 10 Hr. Comprehensive training shall be provided by TPSDI.
- Job specific training like Excavation, Confined space, Mobile crane safety, Road safety, Scaffolding certification, first aid and any other related to Job will be done separately through either TPSDI or certified institute.
- Competency assessment fees are included in the L-Comprehensive training fees; no additional charges will apply.
- The competency assessment will give equal weightage to safety-related and technical questions (50% each) during assessment.
- Certification will be issued based on performance as follows:
 - **Gold:** Score above 90%
 - **Silver:** Score between 80-90%
 - **Bronze:** Score between 70-80%
 - **Fail:** Score below 70%, no certificate issued
- After L- Comprehensive training & Assessment by TPSDI, all supervisors/Safety supervisors shall mandatorily attend and complete one day training program at Division/Discom level conducted by Division/Discom Safety Head & order manager. Once he is authorized by order manager/safety officer for supervision of the job then only he shall be given the role of BA supervisor for all Jobs.

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- Gate pass is stamped as L3 trained supervisor by safety head on the gate pass issued to supervisor with validity date of three years or expiry of Gate pass. Retraining will be done after three years. Refresher training of half day mainly for learning from incident will be imparted on renewal of gate pass.



- There is two days or 10 hrs. training programs for AOH- Annual Overhaul.
- Minimum one day Specific technical training at Distribution business shall be carried out through Skill development institute or TPSDI through technical professional.
- Transformation from L1/L2/L3 to L-Compressive training with competency assessment at Odisha and new business/Site will be done after one Year of release of this framework.

4.5 Managing Work:

Order Manger shall -

- 1) Comprehensively assess and ensure field Safety implementation against Contract requirements and the Safety Management Plan.
- 2) Maintain a follow up process that drives continuous improvement in Safety practices and avoids repetition of common errors.
- 3) Order Manager and BA should aim at optimizing Safety performance of the Contract by working in a collaborative manner during the execution of the work.

This can be achieved by:

- Ensure that potential safety hazards are identified and controlled before any contracted work starts. Hazard identification should be conducted using multi-disciplinary teams which includes members from competent safety professional/execution team/competent BA supervisor & workforce to understand and identify project-specific safety hazards.
- Monthly inspection and replacement of damaged Personal Protective equipment -PPE & Critical Equipment, lifting Tools & Tackles and hand tools used at site.
- **PTW** - PTW procedure must be adhere and implement at site.

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- Reviewing the Safety Management Plan (**CSM F9– Site Safety Management Plan**) before each stage of work begins.
- **TBT & Mass Meeting:** Every day Tool box talks to be conducted based on JSA/SOP with maximum participation of BA Workforce & Safety points to be shared by BA employee & line manager and 100% participation of BA employee & workmen in to mass meeting/communication.
- **BA Self safety audit:** BA Safety Supervisor will carry out daily safety audit and inspections of tools, tackles, equipment and PPEs. They will identify and help in correcting the unsafe acts and unsafe conditions created while executing job at site with the help of BA's supervisors.
- All respective **Critical safety Rules & Procedures and General safety Rules & Procedures** to be use and implement at site during job.
- **"Suraksha Samwad"** also known as Safety Interaction is a proactive safety initiative. In this program, leadership engages with BA workmen and employees in a scheduled 30-minute session to discuss and observe safety practices in the workplace.
- **Reporting safety observations by BA employee:** This involves the active participation of the workforce in identifying and reporting safety observations, which can help prevent accidents and improve safety performance.
- **Felt Leadership for Business Associates Proprietor /Co-ordinators:** This program aims to develop leadership skills within the Business Associates Proprietor/Co-ordinators. It encourages individuals to take ownership of their work and fosters a culture of responsibility and accountability.
- **Behavior based safety program (Jivan Ki Aur):** It aims to create regular awareness among all ground staff. It seeks to sensitize them, establish relationships, foster teamwork, enhance communication, motivate and empower everyone, promote good health, and enable a happy and safe life. The program will cover various activities such as morning meetings, home visits, personal meetings, group meetings, short training sessions, games, and other forms of engagement.

4.2 Periodic Evaluation:

1. During the time of job execution, regular site inspection will be carried out by the Tata Power-Division /DISCOM officials **mainly Line manager (R6)** to evaluate monthly safety performance of the Business Associate as per **CSM F11 Safety Performance Evaluation Report (R6)** and monthly score will be maintained by the Order Manager. Violations will

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

be dealt as per **CSM F12 Safety Violation Penalty Criteria**. Please refer **CSM F10 Process Flow Chart for Safety Performance Evaluation**. Percentage of retention amount is usually mentioned in safety terms and conditions.

- The evaluation criteria include Lead Indicators such as percentage of workers trained in TPSDI, inspection of critical equipment. Lag indicators such as Fatalities, LWDC and man-days lost.
- In case of job stoppage due to safety violations / unsafe observations at the site, no time extension from PO completion date shall be given to the Business Associate, if such delays are attributable to Business Associate.
- In case of fatality, limb loss or loss of property, vendor must pay for liability, legal, statutory, and additional mutually agreed settlement charges imposed by the appointed committee by Division Chief/CEO. This charge is over and above the retention amount. The committee will finalize penalty amount based on factors such as advice by statutory authorities, contract value and impact of accident etc.
- Order Manager, Head of Business and functional Chief have the authority to terminate the contract as per **CSM F12 Safety Violation Penalty Criteria** Through contract department.
- Site contract team will arrange Quarterly meeting with Order Manager to take feedback for Safety performance of Business Associates In-turn Site Leadership and Site Contract team will give feedback of safety performance so as to take Corrective actions (R6).
- CSM F11 Safety Performance Evaluation Report (R8) to be used to evaluate Star Rating of Business Associate for lead & Lag Indicator.**

4.2.1 Safety performance retention: A certain percentage of the bill value will be retained against every running bill as safety performance retention. The amount will be released with the last invoice or every six-month based on Safety Performance Score of Business Associate s. The retention amount will be calculated based on contract value as below.


Risk Category	Contract Value	Retention Amount (%)
Very high/High risk job/ Medium Risk jobs	Up to 10 Lakhs	2.5
Very high/High risk job/ Medium Risk jobs	10 – 50 Lakhs	2
Low/Very Low Risk jobs	10 – 50 Lakhs	1
Very high/High risk job	0.5 to 10 Cr	2
Medium Risk jobs	0.5 to 10 Cr	1.5
Low/Very Low Risk jobs	0.5 to 10 Cr	1
Very high/High risk job	>10 Cr	1.5
Medium Risk jobs	>10 Cr	1

- The safety retention amount will not be applicable if there is clause of Contract Performance Bank Guarantee (CPBG) and safety performance of Business Associate is as

The Tata Power Company Ltd Document No. TPSMS/GSR/STC/009 REV 06		Appendix 2 to BASCC Safety Terms and Conditions Date of Issue: 01/03/2024
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

- per desired criteria.
- If safety performance of Business Associate is not as per desired criteria (as per Appendix 10 – CSM F10 – Process Flow Chart for Safety Performance Evaluation and Appendix 11: CSM F11 - Safety Performance Evaluation Criteria)-then safety retention percentage as mentioned in table above will be deducted from running bill.
 - Bidder to give understanding that if there are any deductions required to be made for safety non-performance as per the Safety Performance Score, then Tata Power shall recover any such deductions against safety non-performance directly from the monthly bills / final settlement or it shall be within its right to recover such sum from accounts payable or the CPBG or the retention of the Business Associate available with Tata Power for the said contract between the Business Associate and Tata Power.
 - The retention amount against non-safety performance saved and Penalty will go to a separate Safety Improvement Fund.
 - For the contract value of more than Rs 1 Cr or contract duration more than 12 months, the retention amount shall be released half yearly based on safety performance. For all remaining contracts, the retention amount will be released with the final bill.
 - Safety performance bonus 1% (limiting to 50 lakhs) of the invoice value will be considered at the end of the job if the contractual safety performance score is 100%

CSM F10 – Process Flow Chart for Safety Performance Evaluation

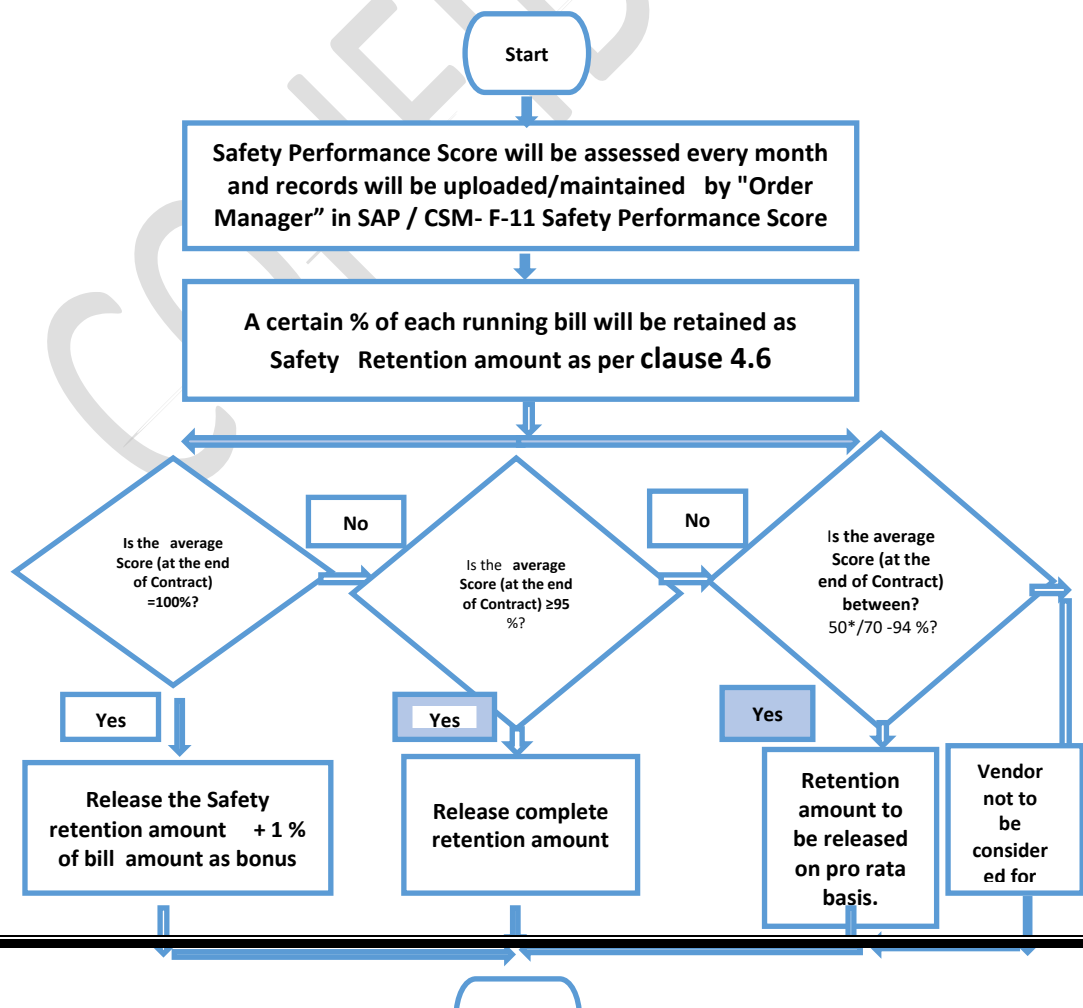

The Tata Power Company Ltd Document No. TPSMS/GSR/STC/009 REV 06		Appendix 2 to BASCC Safety Terms and Conditions Date of Issue: 01/03/2024
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

CSM F11 - Safety Performance Evaluation Criteria (R6)

Safety Performance Evaluation Report- CSM F11

BA field safety audit (Safety Performance Evaluation for BA).

Division		Function	
Name of BA		Month	
Nature of Work		PO	
	A. <u>Lead Indicators</u>		70 (for star rating score will dividend scale of 1.75)
	-	UOM	Target Actual score for the month
1	% of employees certified in Skill development institute/ authorized agency/Card issued.	% Workforce covered	100% 51% to 99% 50% <50%
	Score		10 Pro-rata 5 0
2	Monthly inspection and replacement of damaged Personal Protective equipment -PPE by contractor(Safety shoes, Induction helmet, full body safety harness with work positioning lanyard, rubber insulated gloves, reflective jacket etc.as per Job requirement)	% of total workforce	100% 99% to 50% 50% <50%
	Score		10 7 5 0
3	Monthly inspection and replacement of damaged Critical Equipment, lifting Tools & Tackles and hand tools used at site by BA (Neon Tester, Discharge rod, ladders Vehicle, Tools & tackles carried out and	% Total T&T	100% 99% to 50% 50% <50%

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

	defective equipment replaced as required.						
	Score		10	7	5	0	
4	Unsafe Conditions/Acts (Potential Hazards), near miss(Close calls), minor injury(First aid cases and MTC) cases reported	Observation / Nos of workforce	0.50	0.25	<0.25		
	Score		5	2.5	0		
5	Monthly R&R for workforce along with Tata power reparative monthly	% of total workforce	10%	5%	0		
	Score		5	2.5	0		
6	Nos of workforce covered under program under Jivan Ki Aur/Ghar se Ghar tak/Surkhshit Pariwar ki aur	% of total workforce	10%	5%-10%	<5%	0	
	Score		10	5	0	0	
7	Safe (designated way) Disposal of Waste generated, Records of waste (Hazardous Waste – Oily cotton waste – E-waste etc.) generation. No effluents to drain/discharges to ground		YES	NO			
	Score		5	0			
8	<u>Daily Toolbox talk and Weekly Mass communications covering 100 % workforce and records maintained or not(R6).</u>	% of total workforce	100%	50-100 %	<50%	0	
	Score		10	5	0	0	
9	<u>Check for housekeeping at site(R6)</u>	At least 3S.	YES	NO			
	Score		5	0			

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

	B. <u>Lag Indicators</u>		30 (for star rating score will dividend scale of 1.5)				0
			Target				
1	Number of Fatalities		0	>0			
Score	Score		15	0			
2	No of LWDC - Reportable		0	>0			
Score	Score		10 / 15*	0			
3	Major Fire		0	>0			
Score	Score		5 / 0*	0			
	Total score		100				0
	* Odisha					%	0

CSM F12 - Safety Violation Penalty Criteria

Major Violations and Escalation matrix-

Consequence of safety violation observed not related to incidents or accidents		Violations				
Sl. No.	<u>Safety Violation</u>	1st	2nd	3rd	4th	<u>Subsequent violation</u>
1	Working without required PPE such as Helmet/gloves/safety shoes/Safety harness etc.	A	B	C	D	Will Attract the same penalty as 4th violation
2	Working without proper tools and tackles	A	B	C	D	
3	Poor or bad condition of Crane/Hydra/Vehicle and/or Incompetent driver and/or helper).	B	C	D	E	Termination of Contract and blacklisting after repetition of violations (3 to 4 times as the case may be)
4	Improper Working at Height	B	C	D	E	
5	Untrained /unauthorized workman engaged in high-risk jobs	B	C	D	E	
6	Violation of SOP or WI or LOTO	C	D	E		
7	Working without PTW or LC / Without authorization / Without creating Safe Zone	C	D	E		

Legend	Action to be Taken	Responsibility	Penalty (INR)	Repeat Violations
--------	--------------------	----------------	---------------	-------------------

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

A	Levy of Penalty	Order manager / EIC	5000	The no. of repeat violations shall be calculated cumulative during the FY and deduction will be done from the monthly bills.(R6)
B	Memo to BA and Levy of Penalty	Order manager / EIC	10000	
C	Memo to BA and Levy of Penalty	Order manager / EIC	25000	
D	Memo to BA and Levy of Penalty	Order Manager / EIC	50000	
E	Memo to BA, Levy of Penalty, Termination of Contract, Blacklist	Order Manager / EIC	100000	

Other Violations and Penalty

Penalty shall be imposed on the Business Associate s under the following circumstances for breaching the contractual agreements. The list is not exhaustive, but indicative.

Sl. No .	Description of Violation	Severity	Penalty (INR)
1.	Unhygienic/Bad condition of PPE	2	500
2.	Unsafe Act/Condition of Severity 4	4	4000
3.	Unsafe Act/Condition of Severity 5	5	5000
4.	No Earthing of Electrical equipment	5	5000
5.	Working without efficient supervision	4	4000
6.	Non-reporting of incidents	3	3000
7.	Starting the job without Toolbox Talk	4	4000
8.	Electric cable tied with metal wire / Use of damaged electrical cable / Use of two core cable	3	3000
9.	Rubber mat not available in front of electrical panels.	3	3000
10.	Inserting naked wire into the socket instead of a plug	5	5000
11.	Inflammable materials stored inside PSS/FCC/Distribution Room	5	5000
12.	Water accumulation found near electrical panels / equipment	5	5000
13.	Grinding wheel/ Coupling/ Piling winch/other rotating parts without guard	4	4000
14.	Inadequate illumination of working area	3	3000

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

15	Bringing inside PSS/FCC or any other work area any chemicals without approval.	5	5000
16	Loose materials in work area which can fall down or fly during a storm	5	5000
17	Misusing emergency facilities like fire hydrant line/ hose box/ spray system/ eye wash etc.	3	3000
18	Entering restricted areas like switch yard, hazardous material storage room etc. without authorization	3	3000
19	Not using 24 V lamp inside confined spaces	3	3000
20	Bypassing/overriding safety interlocks	5	5000
21	Working besides road without proper barricading and monitoring of traffic	5	5000
22	Smoking in prohibited area (Closed Go-downs, Storage of flammable material, Storage of Gas cylinders, PSS , Offices etc.)	3	3000
23	Improper stacking of materials in Storage Yard	4	4000
24	Sleeping at workplace	3	3000
25	First aid box not available / in locked condition	2	2000
26	Appointment of subBusiness Associate without his Safety Bid Evaluation and/or without the permission of engineer in charge or Order manager.	5	5% of order value
27	Bad Housekeeping with respect to TPSMS/GSP/GHK/022 <ul style="list-style-type: none"> 1st Instant 2nd instant 3rd instant 4th instant Subsequent instants 	2	<ul style="list-style-type: none"> 1000 2000 5000 10000 10000
28	Violations related to vehicles with respect to TPSMS/CSP/RSP/015. <ul style="list-style-type: none"> Parking without wheel choke Parking in undesignated area Heavy vehicle without helper or co-driver Seat belt not available / not used Driver without license Heavy vehicles without reverse horn Using mobile phone while driving Lights/mirrors not working /broken 	3	1000 per each violation

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

28	<p>Violation in Gas cutting and Gas cylinder handling</p> <ul style="list-style-type: none"> • Cylinder valve without guard • No flashback arrester • Leaky DA/Oxygen hose • Cylinders not kept in secured manner • Cylinder trolley not available • Cylinders are transported by manual rolling 	5	2000 per each violation
29	<p>Violations in Lifting Operations w.r.t. to TPSMS/CSP/HEMS/005</p> <ul style="list-style-type: none"> • Hook latch missing • Load raised or swung over people or occupied areas of building • Persons standing within the swing area of the crane • No barricading of crane working area • Use of damaged lifting tools and tackles • Lifting tools and tackles not tested / Test certificate expired • Crane operator without proper license • Angular loading • Lifting / shifting heavy material without guide rope • Using mobile phone during loading and unloading jobs 	5	2000 per each violation
30	<p>Violation in Scaffolding work w.r.t. to TPSMS/CSP/SCAF/007</p> <ul style="list-style-type: none"> • Unstable scaffolding/nonstandard Scaffolding in use • Handrails/mid rails/toe guards missing • Safety harness not anchored on fixed structure • Opening found in working platform 	5	2000 per violation
31	<p>Violation in Excavation Work w.r.t. to TPSMS/CSP/EXS/002</p> <ul style="list-style-type: none"> • Loose material falling into excavated pit • Water logging in excavated pits / trenches • Inadequate or no barricading • Undercut / cave in found on sides of excavated pits 	4	2000 per violation
32	Caution boards, danger signs (luminescent /red) along with emergency contact number are not found displayed.	3	3000
34	Spillage of hazardous material/chemicals during transportation	4	4000

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Penalty for Incidents / Accidents-()

Consequence of incident / Accident		Incident / Accident				Action Required
Sr.No.	Type of Injury	1st	2nd	3rd	4th	
1	Major Injury (Bone injury or burn or hospitalization >48 hrs.) Non-fatal	F	F	G	G	Intolerable
2	Major Injury (Bone injury or burn or hospitalization >48 hrs.) Non-Fatal (Two or more non-Fatal in one event)	G	G	H		
3	Single fatality	G	H			
4	Multiple fatalities (Two or more fatalities in one event). Anywhere in Tata power.	H				

Legend	Action to be taken	Responsibility	Penalty (INR)	The no. of violations shall be calculated cumulative during FY and deduction will be done just after Consequence of incident / Accident(R6)
F	Memo to BA and Levy of Penalty	Order Manager/Engineer in charge	200000	
G	Memo to BA and Levy of Penalty	Order Manager/Engineer in charge	500000	
H	Memo to BA, Levy of Penalty, Termination of Contract and Blacklisting the BA	Order Manager/Engineer in charge	1000000	

5.0 Tools and Tackles

- 5.1 Tools & Tackles used to carry out the job shall be checked and inspected by Order Manager and safety Officer.
- 5.2 Vendor must submit a valid Certificate from Competent person under the Factories Act 1948 and State Factories Rule for all Lifting Tools and Tackles (like Hoist, D Shackles, chain Block, wire ropes etc.).
- 5.3 All Electrical Hand Tools must be tested for leakage of current by a person /agency authorized by Tata Power Division /Discoms. Electrical power must be taken though RCCB of 30mA. Electrical hand tools should not have cord more than 3 meters in length. If power source is at > 3 meters, extension boards with RCCB of 30 mA and ON/OFF switch, shall be used.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

5.4 Removal or inclusion of tools any new tool /tackles / machinery / equipment at site should only be done with concurrence of the order Manager / Head Safety.

6.0 Site Safety Rules and Procedures:

The work in the safest possible manner can only happen when it has been carefully planned and all applicable procedures are followed. The Tata Power Safety Procedures are derived from Tata Power best practices and the applicable Government acts regulations. In each case, the most stringent regulation is used. All safety rules and procedures developed from time to time shall be mandatorily followed by the vendor and his employees while working at Site.

7.0 Critical safety Rules and Procedures:

Following is the list of Tata Power's critical Safety Rules and Procedures. Business Associate shall refer to approved Rules and Procedures for detailed requirements and ensure conformance

7.1 Lock Out and Tag Out Procedure.

This procedure is intended to be used for the protection of Personnel while servicing or performing maintenance on distribution network/ equipment / pipeline / vessel / process systems. This is a general procedure that shall be used as the minimum requirements for isolation of equipment, pipelines, machines, system from all possible sources of hazardous energy and / or material such as Steam, Hot Water, Compressed Air, any other process fluid / chemical energy /Mechanical energy or Electrical energy. For complete procedure kindly refer Procedure Document No. **TPSMS/CSP/LOTO/001**

7.2 Excavation Safety (Shoring and Sloping) Procedure

This procedure is developed to cover the safe practices required for shoring and sloping in excavation and trenching jobs. This procedure is developed to establish mandatory requirements for practices to protect personnel, property and equipment from hazards associated with above activities. For complete procedure kindly refer Procedure Document No **TPSMS/CSP/EXS/002**

7.3 Confined Space Entry Procedure:

This procedure outlines the steps required to perform the confined space entry and to protect personnel from the hazards of entering and conducting operations in confined spaces. For complete procedure kindly refer Procedure Document No – **TPSMS/CSP/CSE/003**.

7.4 Working at Height Procedure:

This procedure describes the rules and procedures to protect employees from the hazards of working at heights. This procedure is developed to cover the safe practices required for Working at Heights. This procedure is developed to establish mandatory requirements for practices to protect personnel from hazards associated in this area. For complete procedure kindly refer Procedure Document No – **TPSMS/CSP/WAH/004**.

7.5 Heavy Equipment Movement Safety Procedure.

Heavy equipment lifting and movement is an activity involving loading, unloading,

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

storage and movement from one place to another including lifting and erection or repairing of equipment with cranes or hoists. Material, machinery and equipment handling operations are being carried out by large capacity cranes and hoists, which make the job safer and faster. This procedure addresses the hazards and precautions associated with such equipment and their use. For complete procedure kindly refer Procedure Document No –TPSMS/CSP/HEMS/005.

7.6 Mobile Crane Safety Procedure.

Mobile cranes are responsible for many incidents, injuries. Falling loads from mobile cranes pose a severe hazard to operators and nearby workers and property. Many types of cranes, hoists, and rigging devices are used for lifting and moving materials. To maintain safe, appropriate standards must be adhered to and only qualified and licensed individuals shall operate these devices. For complete procedure kindly refer Procedure Document No –TPSMS/CSP/MCS/006.

7.7 Scaffold Safety Procedure.

This procedure is developed to provide information on the safe erection, use, dismantling and maintenance of access scaffolding in the workplace. It is developed to establish mandatory requirements for practices to protect personnel from hazards associated with erection, use and dismantling of scaffolds. For complete procedure kindly refer Procedure Document No –TPSMS/CSP/SCAF/007.

7.8 Permit to Work Procedure.

Given the inherent hazards of the power generation and distribution industry, a significant number of TATA POWER operations and installations are critical. Work Permit (WP) System is an essential element in controlling the workplace risks in an effective manner. For complete procedure kindly refer Procedure Document No –TPSMS/CSP/PTW/008.

7.9 Job Safety Analysis (JSA) Procedure.

This objective of this procedure is to have a task-based risk assessment process in place that identifies, evaluates and controls the risks associated with work activities, and as a result, prevents those involved in the task or those potentially affected by the task, from being harmed. For complete procedure kindly refer Procedure Document No- TPSMS/CSP/JSA/009 REV 01.

7.10 Electrical Safety Procedure.

The objective of these standards is to specify minimum mandatory requirements and advisory guidance for identifying and controlling hazards to ensure 'Zero Harm' regarding operation maintenance and testing of electrical equipment. For complete procedure kindly refer Procedure Document No- TPSMS/CSP/ELEC/010

7.11 Fire Safety Management Procedure.

Objective of This standard is to specify the minimum mandatory requirements and advisory guidelines to ensure prevention of fire related incidents and managing / controlling their impacts if they do occur. For complete procedure kindly refer Procedure Document No - TPSMS/CSP/ELEC/011

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

7.12 Hazard Identification & Risk Assessment (HIRA) Procedure:

Objective of this procedure is to define guidelines for Hazard identification, Risk assessment and determination of controls. For complete procedure kindly refer Procedure Document No - TPSMS/CSP/HIRA/012.

7.13 Management Of Change (MOC) Procedure:

The objective of this document is to establish the procedures necessary to ensure that HSE risks are managed to an acceptable level in Tata Power Management of Change (MOC) process. For complete procedure kindly refer Procedure Document No - TPSMS/CSP/MOC/013.

7.14 Pre-Start-up Safety Review (PSSR) Procedure.

Objective of this procedure is to provide guidelines for safe initial startup of a new facility or restart of a modified facility. The PSSR process verifies that the new/modified facility meets the original design and operating parameters. The intent is to prevent incidents caused by inadequate, incomplete, unauthorized design, construction, installation, and/or commissioning. For complete procedure kindly refer Procedure Document No - TPSMS/CSP/MOC/014.

7.15 Road Safety procedure:

To provide Safety Rules for road travel management and safe usage of all types of vehicles viz. passenger/ commercial, owned/ hired by company, driven by employees or Business Associate s. For complete procedure kindly refer Procedure Document No - TPSMS/CSP/RSP/015.

8.0 General safety Rules and Procedure:

8.1 Lift (Elevator) Safety Procedure:

To provide safe operating procedure for taking control of lift car before entering and existing the pit of OTIS make elevators. For complete procedure kindly refer Procedure Document No – TPSMS/GSP/LIFT/001,

8.2 Working on conveyor belt Procedure:

This procedure is developed to cover the safe practices required for Working on live equipment and to protect personnel from hazards associated with it. For complete procedure kindly refer Procedure Document No – TPSMS/GSP/CONV/003

8.3 Batteries Handling & Disposal

To provide procedure for recycling and / or safe disposal of used / waste batteries in compliance with all legislation. For complete procedure kindly refer Procedure Document No – TPSMS/GSP/HAZM/003

8.4 Material Handling and Storage Procedure:

The purpose of this document is to provide procedures to assist the safe handling of materials (manual handling and mechanical handling). For complete procedure kindly refer Procedure Document No – TPSMS/GSP/MATL/004.

8.5 Office Safety Procedure:

The objective is to provide a safe working environment to those working in office premise, who may be exposed to emergency situations and other chronic /

The Tata Power Company Ltd		Appendix 2 to BASCC Safety Terms and Conditions
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

cumulative risks that may arise due to various reasons of unsafe act, unsafe condition, fire and or pandemic crisis like COVID-19 etc. For complete procedure kindly refer Procedure Document No - **TPSMS/GSP/OFS/006**

8.6 Earth Leakage Circuit Breaker (ELCB) Testing Procedure):

The objective of this procedure is to define the minimum requirements for testing of Earth Leakage Circuit Breaker (ELCB). For complete procedure kindly refer Procedure Document No - **TPSMS/GSP/ELCB/008**.

8.7 Occupational Health & Safety Legal Compliance Procedure:

Objective of this procedure is provide guidelines for compliance of Occupational Health & Safety (OH&S) legal requirements and all ratified protocols and agreements are incorporated in Tata Power Safety Management System (SMS). For complete procedure kindly refer Procedure Document No - **TPSMS/GSP/LEGL/009**.

8.8 Incident Reporting & Investigation Procedure:

Objective of this procedure is to outline the process for reporting, recording and investigating an incident, recommending corrective and preventive actions and to communicate the lessons learned to prevent recurrence of similar incidents. For complete procedure kindly refer Procedure Document No - **TPSMS/GSP/IRI/011**.

8.9 Business Associate Safety Management Procedure.

The purpose of this document is to engage with Business Associate s in a way to create safe work environment for everyone working for Tata Power. For complete procedure kindly refer Procedure Document No – **TPSMS/GSP/CSM/015**.

8.10 Tree Trimming Procedure:

The objective of this procedure is to define guidelines and minimum requirements for Tree trimming. For complete procedure kindly refer Procedure Document No – **TPSMS/GSP/TTRM/017**

8.11 Safe Lone Working Procedure:

Objective of this procedure is to lay down guidelines for reduction and safe managing of any additional risk arising from lone working. For complete procedure kindly refer Procedure Document No – **TPSMS/GSP/LONE/019**.

8.12 Good Housekeeping(5S) Procedure:

Objective of this procedure is to explain the meaning, importance and provide guidelines for implementation of Good Housekeeping(5S) at workplaces across organization. For complete procedure kindly refer Procedure Document No – **TPSMS/GSP/GHK/022**.

8.13 Personal Protective Equipment:

This procedure describes the basic requirements, applicability, minimum specifications of Personal Protective Equipment (PPE). For complete procedure kindly refer Procedure Document No – **TPSMS/GSP/PPE/023**.

8.14 Process Safety Management Procedure:

The objective of this document is to provide a standardized & uniform guideline to

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
Document No. <i>TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

implement Process Safety Management in Tata Power, its JVs, and subsidiaries to prevent or minimize the consequences of releases of toxic, flammable, pressurized or uncontrolled chemicals/Steam/Water or any other material which may result in toxic, fire, explosion, burn or flood like situation. For complete procedure kindly refer Procedure Document No – ***TPSMS/GSP/PSM/024***

The above procedures will be updated time to time and the updated version of the procedures as well as any additional critical procedure will be available on official website of Tata Power (www.tatapower.com) for your reference.

9.0 Pre-Employment and Periodic Medical check-up:

Business Associate shall arrange to conduct a pre-employment and periodic medical check-up for its entire workforce by Tata Power medical officer or Tata Power authorized medical officer. The Business Associate shall be able to produce the certificate prior to the employment. The Business Associate shall also organize to conduct periodical medical checkup (six monthly) for the following category of employees:

- Drivers (Check for Vision & Hearing)
- HEM Equipment Operators (Check for Vision & Hearing)
- Workforce working at Height (Check for Vision, Hearing, Vertigo & Height Phobia)
- Workforce Handling the hazardous substances - Coal, ash and chemicals (Chest X-ray and Lung Function T)
- Workforce in high Noise area (> 90 Decibel), Check for Hearing
- Workforce handling radiography equipment for conducting NDT.
- Workforce, working in specific areas requiring specific medical attention should conduct the medical tests test as laid down in the respective Site Safety Management Plan.

10.0 Other Conditions:

- 10.1** The manpower/vehicles/Tools & Tackles/Equipment provided shall be as per mutually agreed SLA.
- 10.2** No Supervision No work policy should strictly be followed.
- 10.3** Test Before Touch must be ensured every time a job is being carried out in electrical network.
- 10.4** HIRA /JSA as per the job scope must be prepared in detail and submitted along with Site Safety Plan by the successful bidder.
- 10.5** Personal protective equipment (PPE) must always be checked before use to ensure that they are in good condition and clean. Replace them if necessary.
- 10.6** All relevant PPE shall be provided by the vendor while working at the site.
- 10.7** Housekeeping shall be maintained all the time while execution of work. All the unwanted material shall be removed from the site at the end of the day's work.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Old/damaged parts if taken out of the system shall be kept at identified placed and it shall be shifted to scrap yard or disposed of as per instruction of order manager.

Sr. No	Type of Audit	Frequency
1	Tool Bag and PPE audit	Weekly
2	First Aid Box Maintenance Record	Fortnightly
3	Fire Extinguisher Record(Applicable for the BA involved in major construction works and have storage of flammable material at worksite)	Monthly
4	Safety Talk Register	Weekly
5	Site Safety Audit	Daily

10.8 Site Safety Plan shall be prepared by successful bidder along with order manger. Appendix 1 to be filled by successful bidder and submitted to Tata Power safety in-charge, before mobilization of team at site and start of the work.

10.9 The Owner or Proprietor of BA must visit worksite at least once in a month and meet Order Manager every month. In case of incidents, the Owner or Proprietor of BA is required to attend Time Out Meetings to understand the gaps that contributed to the incident.

11.0 Schedule of Safety Audits by BA Safety Staff

Safety Undertaking of BA by way of Affidavit

I _____ s/o _____ R/o _____ (AUTHORIZED REPRESENTATIVE/PARTNER/DIRECTOR/PROPRIETOR) of M/S _____ (name of company/firm)___ having its office at (Complete address of Company), authorized vide power of attorney dated -----/Board resolution dated----/letter of authority dated----, hereinafter referred to as **Business Associate [or Business Associate (BA)]** which expression shall, unless it be repugnant to or inconsistent with the meaning or context thereof, be deemed to include its heirs, executors, administrators, and assigns do hereby affirm and undertake as under :

1. The present undertaking shall remain in force from the date of execution of contract and shall be valid till the date of termination of the said contract by either party. The undertaking is binding on me (Business Associate) as well as my sub-Business Associate and its employees, representatives etc.
2. That I (the Business Associate) will be responsible and liable to comply and abide by all the safety rules, instructions and regulations as may be specified and laid down by the Discom to achieve its goal of Zero for on-site incidences.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
<i>Document No. TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

3. That the Business Associate shall be fully responsible for ensuring occupational health and safety of its employees, representatives, agents as well as of its subBusiness Associate's employees, at all times during the discharge of their respective obligations under the contract including any methods adopted for performance of their tasks / work.
4. That Business Associate shall ensure ,at its own expense to arrange for and procure, implement all requisite accident prevention tools, first aid boxes, personal protective equipment, fire extinguisher, safety training, Material Safety Data Sheet, pre-employment medical test, etc. for operations & activities including as & when so specified by Discom specifically. , failing which Discom shall be entitled, but not obliged, to provide the same and recover the actual cost thereof from the Business Associate's payments.
5. That the Business Associate shall engage adequate and competent Safety – Supervisor / Engineer / Manager / Skilled persons at site as per the Para 5 (Qualification and experience of safety personnel) and Annexure 3 of Contract Safety Management.
6. That the Business Associate shall engage the competent Site – Supervisor with each group of workers for safe and correct workmanship, proper co-ordination of material and site work as per contract.
7. That the Business Associate shall immediately replace supervisor in case it is found to be not up to the level of skill and experience required, but any such replacement shall be only with the prior concurrence of the Discom representative.
8. That the Business Associate and its sub Business Associate s shall abide by all the safety guidelines as per Safety Manual, Contract Safety Management and other guidelines issued from time to time by Discom during the contract period.
9. That in case the Business Associate and/or any of its Sub Business Associate fail to ensure the compliance as required in terms of this undertaking the Business Associate shall keep and hold Discom / its directors / officers / employees indemnified against any / all losses / damage / expense / liability / fines / compensation / claims / action / prosecutions or the like which might be suffered by Discom or to which Discom might get exposed to as a result of any breach /wilful negligence /deliberate default on the part of the Business Associate /Sub Business Associate in complying with the same. Business Associate shall also furnish any press release, clarification etc. if sought by

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

Discom for any near miss or safety violations, accidents, which are attributable to fault of Business Associate .

DEPONENT

VERIFICATION

Verified aton this _Day of _____20__ that the contents of the above affidavit are true and correct and nothing material has been concealed therefrom.

12.0 General Safety Conditions for various contracts Specific to Odisha Discom

12.1 Safety Conditions for maintenance of STS (Sub Transmission System) Network.

A BA awarded a major contract work of maintenance of sub – transmission network in area of a power system will be required to fulfil the following conditions:

- Availability of Discharge Rods - Minimum 6 Nos. in each maintenance vehicle, fit for purpose and in good conditions and defective rods are removed from service.
- Availability of Neon tester - Minimum one Neon Tester in each Maintenance Vehicle, in good and working condition and defective or non-standard neon testers are removed from service.
- Electrical hand Gloves - Minimum two sets of 33 KV and two sets of 11 KV in maintenance vehicles.
- The BA linemen must be having required ELBO certification for the voltage level involved.
- BA shall provide Safety Policy, Safety Objectives, Organogram showing structure and responsibility of Safety management of his company and shall document the work practices and procedures in terms of Safety Management.
- BA shall comply with all statutory requirements like applicable acts, regulations, codes of practice, OHSAS Standards, Labour laws, etc.
- The BA shall participate in Safety promotional activities like celebration of Lineman day on 4th March, National Fire Service Day on 14th April and Theme based safety campaigns undertaken by the Discoms every month.
- BA shall abide by Safety manuals and guidelines of Discom issued from time to time.
- BA shall ensure safety training and induction program for the employees. The BA employees must carry safety training card / competency card to the worksite and produce the card on demand.
- All BA employees must be given valid ID card issued by BA cell of Discom who will check statutory compliances before issuing ID cards.
- BA shall not employ a new workman without training and issue of ID card.
- BA shall conduct safety audits & inspections as per Discom procedures.
- BA shall provide proper PPEs as per CSM F-8 ensure periodic inspection of PPE, Tools and tackles to ensure their serviceability.
- BA shall ensure the adherence to standard operating procedures or guidelines laid down by the Discoms.
- BA shall ensure that no job shall be carried out without efficient supervision.
- BA shall ensure reporting of any unsafe act, unsafe conditions, near miss, incident, or accident to engineer in-charge and SAFETY team of the Discom.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
<i>Document No. TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

- BA shall provide safety performance and Safety MIS to engineer in-charge and Discom SAFETY group periodically. Based on any non-confirmation to the safety procedures and guidelines, BA is liable to be negatively marked for his performance and suitable penalty will be imposed.
- BA safety staff shall work as per the guidance of the Discom safety department and functionally report Safety Head of Discom. Any leaves by safety staff of the BA shall have to approved by Discom Safety Department.
- BA shall ensure to depute Safety Staff for managing safety in worksites. In case the BA has been awarded work in more than one area power system, then the following safety structure will be adopted.
- Safety manager and Safety engineer must be having PDIS or ADIS.



12.2 Safety Conditions for maintenance of 11 KV and LT Network.

A BA awarded a major contract work of maintenance of 11 KV and LT Network in area of a power system will be required to fulfil the following conditions:

- Availability of Discharge Rods - Minimum 6 Nos. in each PSS/FCC and maintenance vehicle, fit for purpose and in good conditions and defective rods are removed from service.
- Availability of Neon tester - Minimum one Neon Tester in each PSS/FCC/ Maintenance Vehicle, in good and working condition and defective or non-standard neon testers are removed from service.
- Electrical hand Gloves - Minimum two sets of 33 KV and two sets of 11 KV in each PSS/Maintenance vehicles and two sets of LT hand gloves at each FCC.
- The BA linemen must be having required ELBO certification for the voltage level involved.
- BA shall provide Safety Policy, Safety Objectives, Organogram showing structure and responsibility of Safety management of his company and shall document the work practices and procedures in terms of Safety Management.
- BA shall comply with all statutory requirements like applicable acts, regulations, codes of practice, OHSAS Standards, Labour laws, etc.
- BA shall abide by Safety manuals and guidelines of Discom issued from time to time.
- BA shall ensure safety training and induction program for the employees. The BA employees must carry safety training card / competency card to the worksite and produce the card on demand.
- All BA employees must be given valid ID card issued by BA cell of Discom who will check statutory compliances before issuing ID cards.
- BA shall not engage new workman without training and issue of ID card.
- PSS operator shall not be involved in maintenance activities.
- BA shall conduct safety audits & inspections as per Discom procedures.
- BA shall provide proper PPEs as per CSM F-8 ensure periodic inspection of PPE, Tools and tackles to ensure their serviceability.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
Document No. TPSMS/GSR/STC/009 REV 06		Date of Issue: 01/03/2024

- BA shall not employ a new workman without training and issue of ID card.
- BA shall conduct safety audits & inspections as per Discom procedures.
- BA shall provide proper PPEs as per CSM F-8 ensure periodic inspection of PPE, Tools and tackles to ensure their serviceability.
- BA shall ensure the adherence to standard operating procedures or guidelines laid down by the Discoms.
- BA shall ensure that no job shall be carried out without efficient supervision.
- BA shall ensure reporting of any unsafe act, unsafe conditions, near miss, incident, or accident to engineer in-charge and SAFETY team of the Discom.
- The BA shall participate in Safety promotional activities like celebration of Lineman day on 4th March, National Fire Service Day on 14th April and Theme based safety campaigns undertaken by the Discoms every month.
- BA shall provide safety performance and Safety MIS to engineer in-charge and Discom SAFETY group periodically. Based on any non-confirmation to the safety procedures and guidelines, BA is liable to be negatively marked for his performance and suitable penalty will be imposed.
- BA safety staff shall work as per the guidance of the Discom safety department and functionally report Safety Head of Discom. Any leaves by safety staff of the BA shall have to approved by Discom Safety Department.
- BA shall refer Construction Safety Manual of the Discom for details.
- BA shall ensure to depute a Safety Supervisor (for workforce up to 100 at site) / a safety engineer (for workforce up to 250 at site) / safety manager (for more than two safety engineers) for managing safety at the project site. In case the BA has been awarded more than one major contracts, then the following safety structure will be adopted.
- Safety Engineers and Safety Managers must be having PDIS or ADIS.



12.4 Safety Conditions for the major contract work in Commercial Department like - MMG, RRG, EAG, etc.:

A BA awarded a major contract work in meter management group & energy auditing group will be required to fulfil the following safety conditions:

- BA shall provide Safety Policy, Safety Objectives, Organogram showing structure and responsibility of Safety management of his company and shall document the work practices and procedures in terms of Safety Management.
- BA shall comply with all statutory requirements like applicable acts, regulations, codes of practice, OHSAS Standards, Labour laws, etc.
- BA shall abide by Safety manuals and guidelines of Discom issued from time to time.
- BA shall ensure safety training and induction program for the employees. The BA employees must carry safety training card / competency card to the worksite and produce the card on demand.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
<i>Document No. TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

- All BA employees must be given valid ID card issued by BA cell of Discom who will check statutory compliances before issuing ID cards.
- BA shall not employ a new workman without training and issue of ID card.
- BA shall conduct safety audits & inspections as per Discom procedures.
- The BA shall participate in Safety promotional activities like celebration of Lineman day on 4th March, National Fire Service Day on 14th April and Theme based safety campaigns undertaken by the Discoms every month.
- BA shall provide proper PPEs as per CSM F-8 ensure periodic inspection of PPE, Tools and tackles to ensure their serviceability.
- BA shall ensure the adherence to standard operating procedures or guidelines laid down by the Discoms.
- BA shall ensure that no job shall be carried out without efficient supervision.
- BA shall ensure reporting of any unsafe act, unsafe conditions, near miss, incident, or accident to engineer in-charge and SAFETY team of the Discom.
- BA shall provide safety performance and Safety MIS to engineer in-charge and Discom SAFETY group periodically. Based on any non-confirmation to the safety procedures and guidelines, BA is liable to be negatively marked for his performance and suitable penalty will be imposed.
- BA safety staff shall work as per the guidance of the Discom safety department and functionally report Safety Head of Discom. Any leaves by safety staff of the BA shall have to approved by Discom Safety Department.
- BA shall ensure to depute a Safety Supervisor for managing safety at worksite.
- The BA for the RRG work shall depute one Safety supervisor.



12.5 Safety Conditions for Major Projects in Distribution Network

A BA awarded a major Projects in Distribution Network shall be required to fulfil the following conditions:

- Availability of Discharge Rods - Minimum 6 Nos. for each project site, fit for purpose and in good conditions and defective rods are removed from service.
- Availability of Neon tester - Minimum one Neon Tester in each project site, in good and working condition and defective or non-standard neon testers are removed from service.
- Electrical hand Gloves - Minimum one sets of 33 KV, 11 KV and LT in each project site.
- The BA linemen must be having required ELBO certification for the voltage level involved.
- BA shall provide Safety Policy, Safety Objectives, Organogram showing structure and responsibility of Safety management of his company and shall document the work practices and procedures in terms of Safety Management.
- BA shall comply with all statutory requirements like applicable acts, regulations, codes of practice, OHSAS Standards, Labour laws, etc.
- BA shall abide by Safety manuals and guidelines of Discom issued from time to time.
- BA shall ensure safety training and induction program for the employees. The BA employees must carry safety training card / competency card to the worksite and produce the card on demand.

The Tata Power Company Ltd		<i>Appendix 2 to BASCC Safety Terms and Conditions</i>
<i>Document No. TPSMS/GSR/STC/009 REV 06</i>		<i>Date of Issue: 01/03/2024</i>

- The BA shall participate in Safety promotional activities like celebration of Lineman day on 4th March, National Fire Service Day on 14th April and Theme based safety campaigns undertaken by the Discoms every month.
- All BA employees must be given valid ID card issued by BA cell of Discom who will check statutory compliances before issuing ID cards.
- BA shall not employ a new workman without training and issue of ID card.
- BA shall conduct safety audits & inspections as per Discom procedures.
- BA shall provide proper PPEs as per CSM F-8 ensure periodic inspection of PPE, Tools and tackles to ensure their serviceability.
- BA shall ensure the adherence to standard operating procedures or guidelines laid down by the Discoms.
- BA shall ensure that no job shall be carried out without efficient supervision.
- BA shall ensure reporting of any unsafe act, unsafe conditions, near miss, incident, or accident to engineer in-charge and SAFETY team of the Discom.
- BA shall provide safety performance and Safety MIS to engineer in-charge and Discom SAFETY group periodically. Based on any non-confirmation to the safety procedures and guidelines, BA is liable to be negatively marked for his performance and suitable penalty will be imposed.
- The BA shall participate in Safety promotional activities like celebration of Lineman day on 4th March, National Fire Service Day on 14th April and Theme based safety campaigns undertaken by the Discoms every month.
- BA safety staff shall work as per the guidance of the Discom safety department and functionally report Safety Head of Discom. Any leaves by safety staff of the BA shall have to approved by Discom Safety Department.
- BA shall ensure to depute Safety Staff for managing safety in worksites. One safety supervisor per project site or 100 persons, one safety engineer for 2 project sites of 250 persons, and one safety manager for four project sites or 500 persons.
- Safety manager and Safety engineer must be having PDIS or ADIS.

